


Surface Reflectance, BRDFs



Aalto CS-E5520 Spring 2023 Jaakko Lehtinen
with some slides from Frédo Durand of M.I.T.


Today

- Reflectance Equation
 - Recap of the BRDF
 - plus details

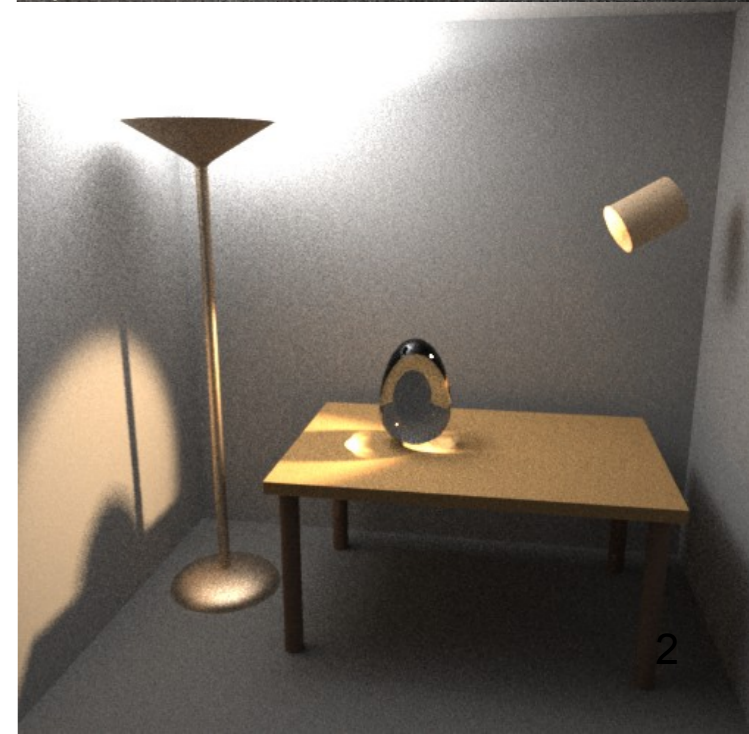

Remember: “How Big Something Looks”

- **Solid angle** \Leftrightarrow projected area on unit sphere

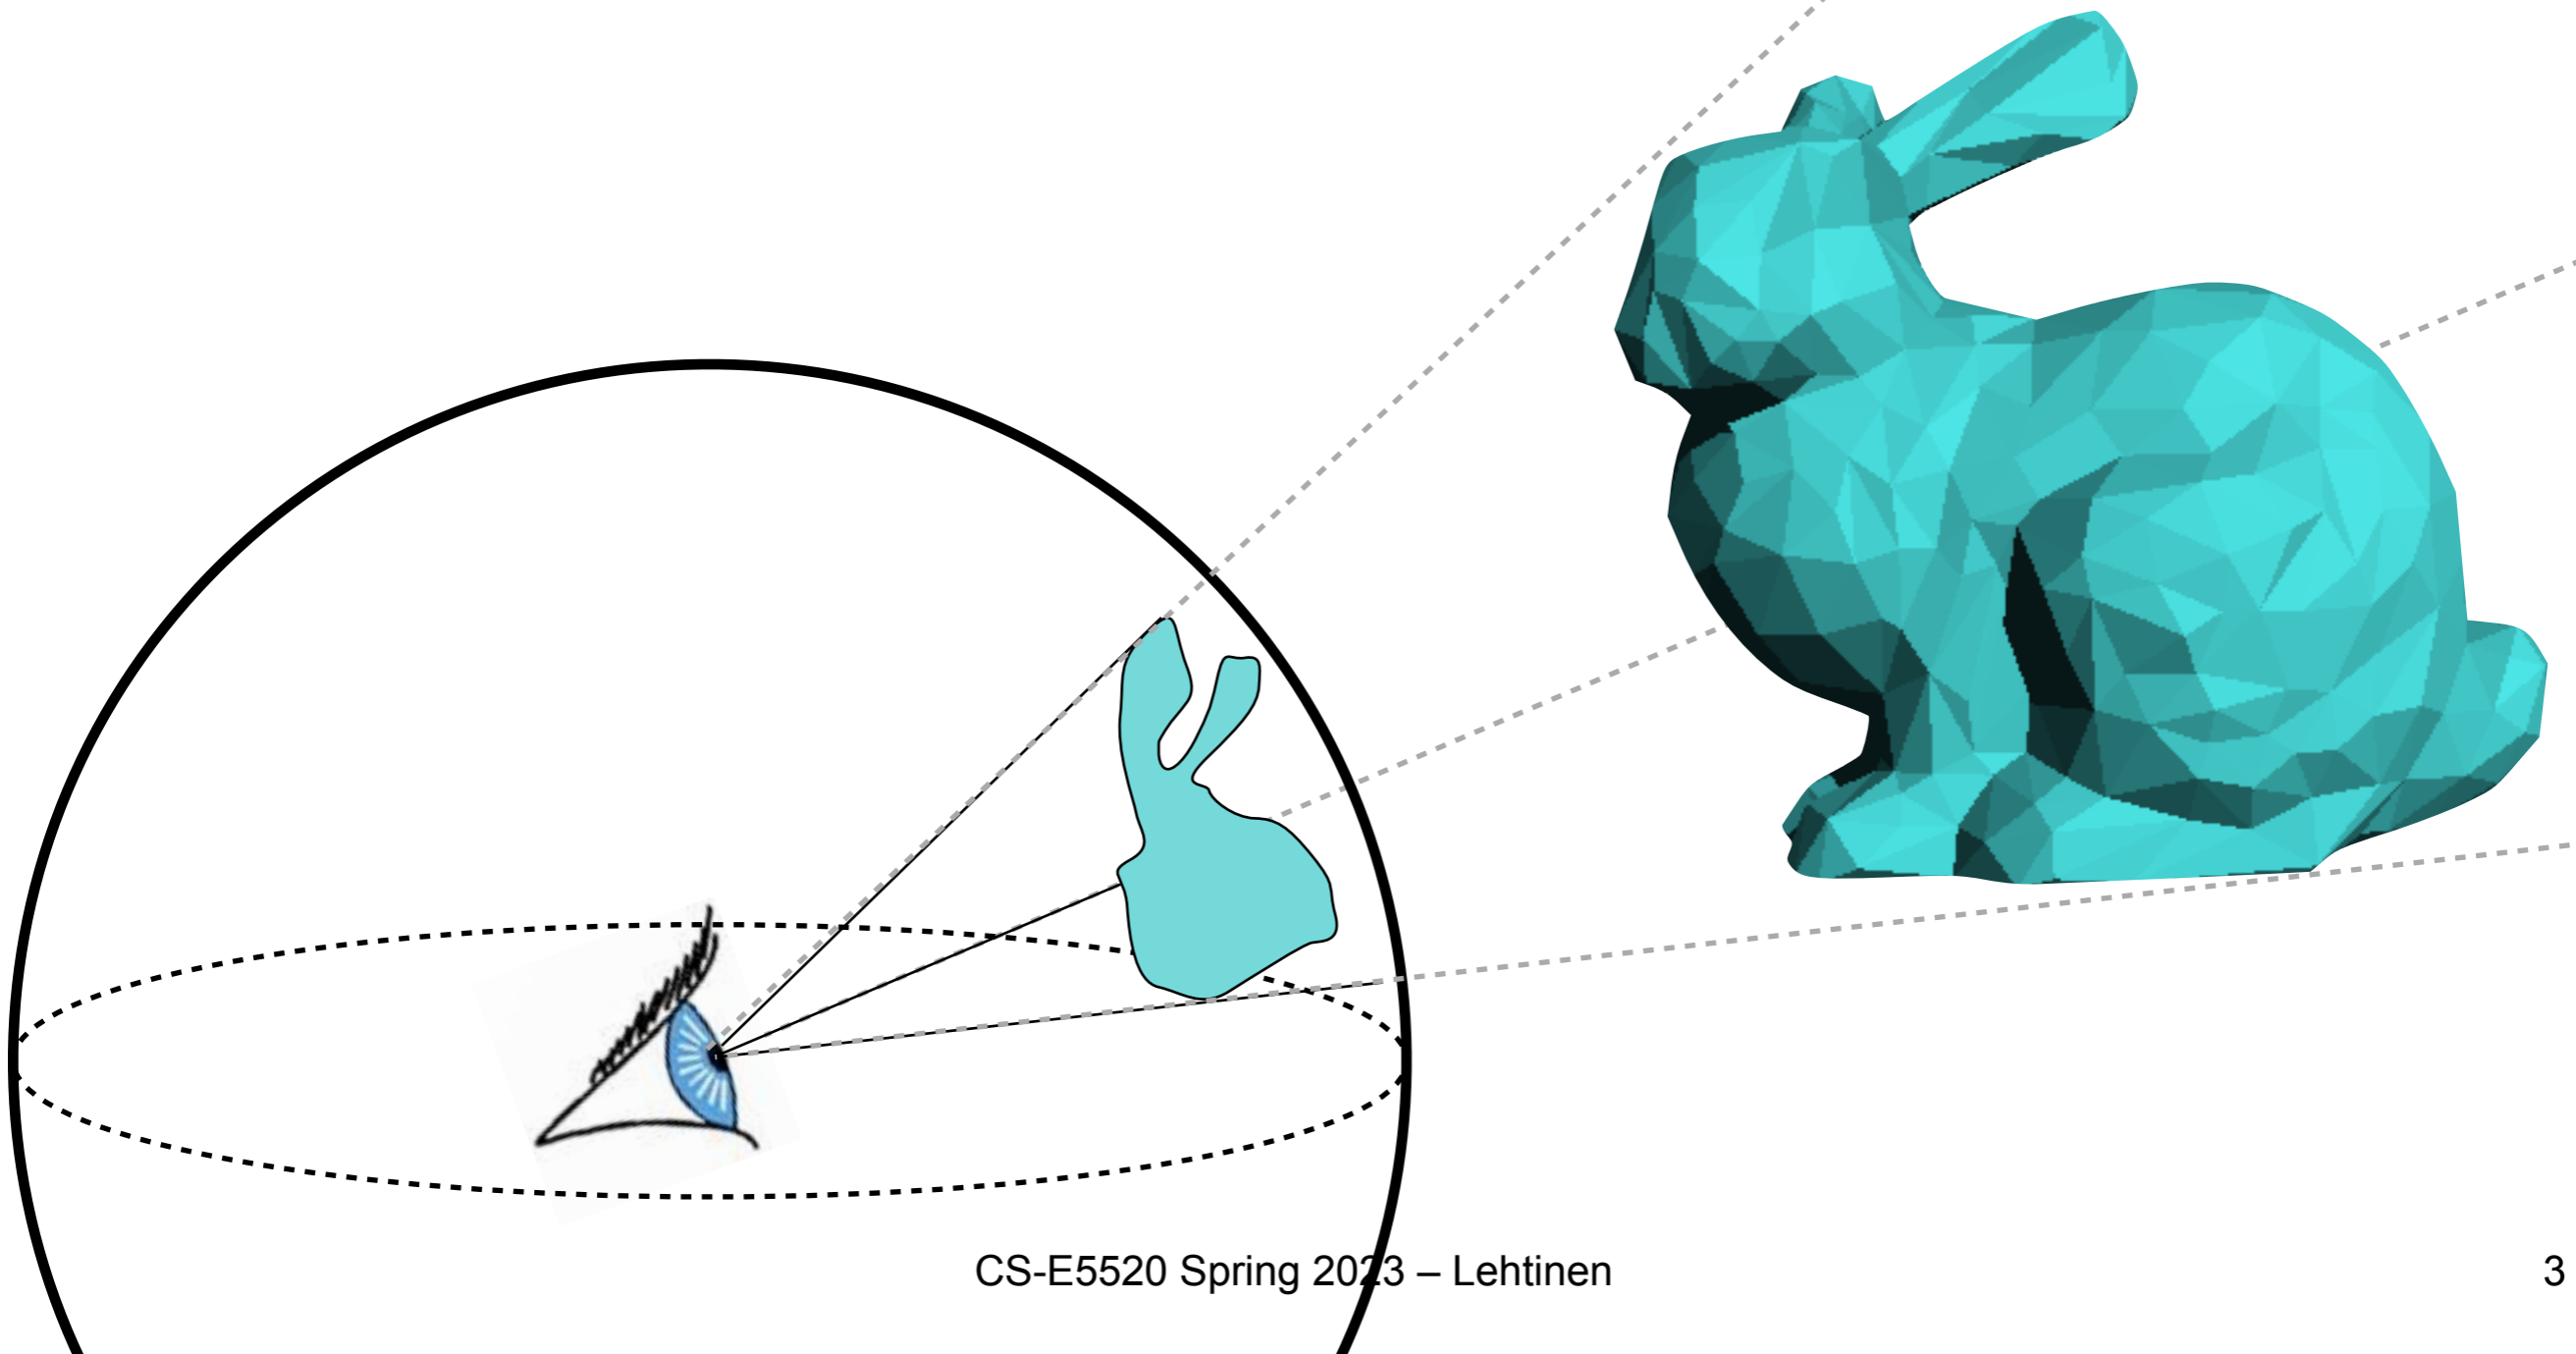

Recap: Radiance


- **Sensors are sensitive to radiance**
 - It's what you assign to pixels
 - The fundamental quantity in image synthesis
- “Intensity does not attenuate with distance”
<=> radiance stays constant along straight lines**
- **All relevant quantities (irradiance, etc.) can be derived from radiance**

**unless the medium is participating, e.g., smoke, fog

Constancy Along Straight Lines

$$L(x \rightarrow y) = L(y \leftarrow x)$$

Radiance is what you think of as “intensity” when you look at a lamp, say.

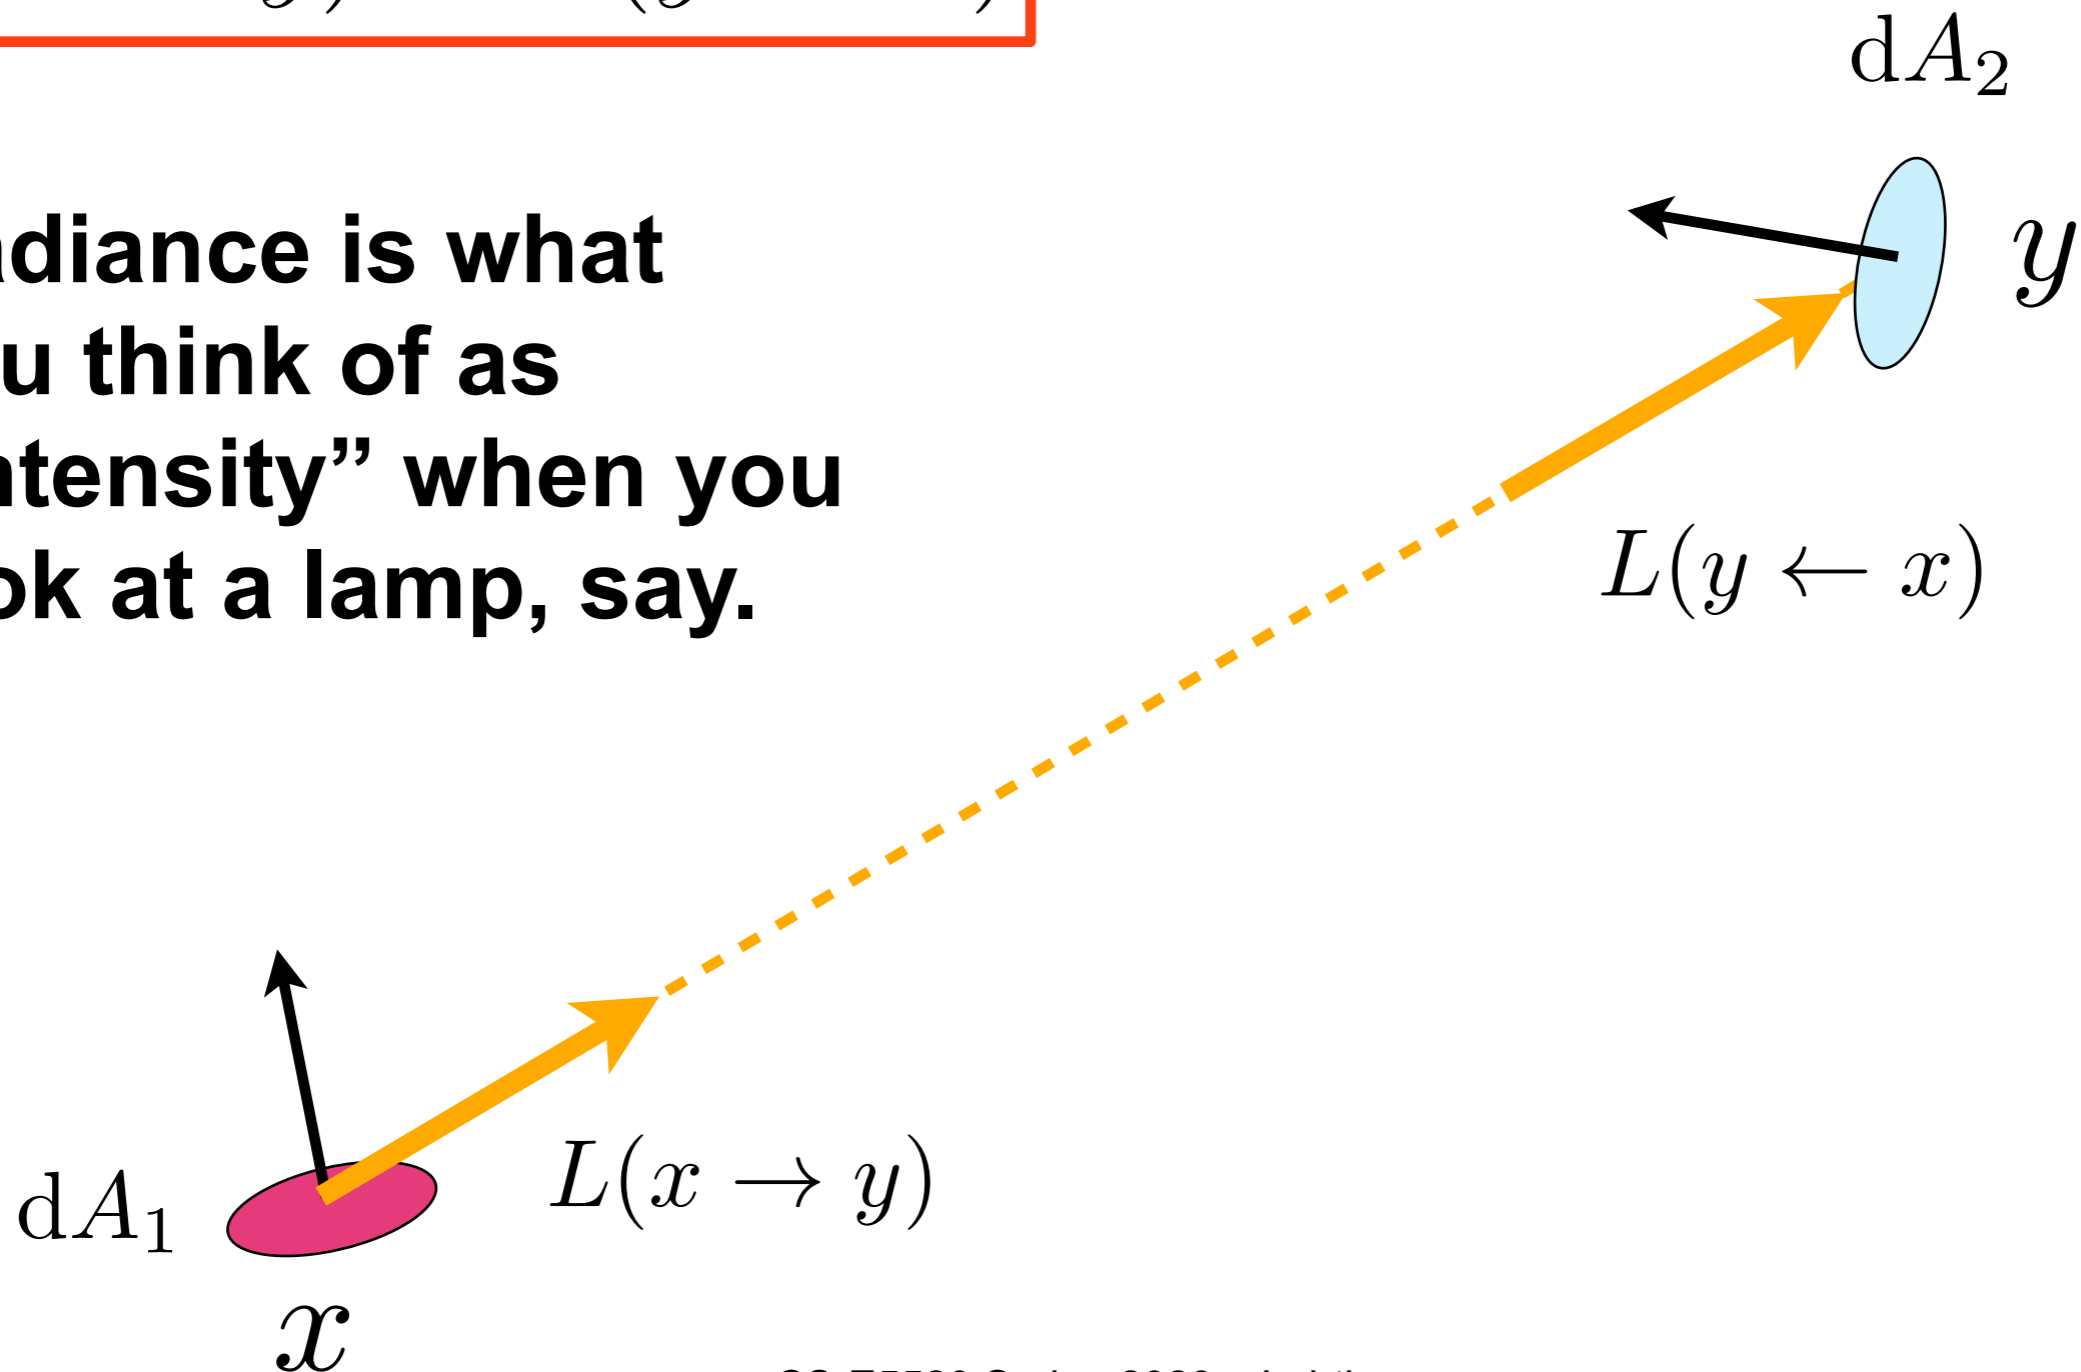

Recap: Radiance

- Radiance L =
flux per unit projected area
per unit solid angle



$$L = \frac{d\Phi}{dA^\perp d\omega}$$

$$[L] = \left[\frac{W}{m^2 sr} \right]$$



Recap: Radiance Notation


- $L(x \rightarrow \mathbf{v})$ denotes radiance leaving dA located at point x towards direction \mathbf{v}
 - Alternative notation: $L_{\text{out}}(x, \mathbf{v})$
- $L(x \leftarrow \mathbf{l})$ denotes radiance impinging on dA located at point x from direction \mathbf{l}
 - Alternative notation: $L_{\text{in}}(x, \mathbf{l})$

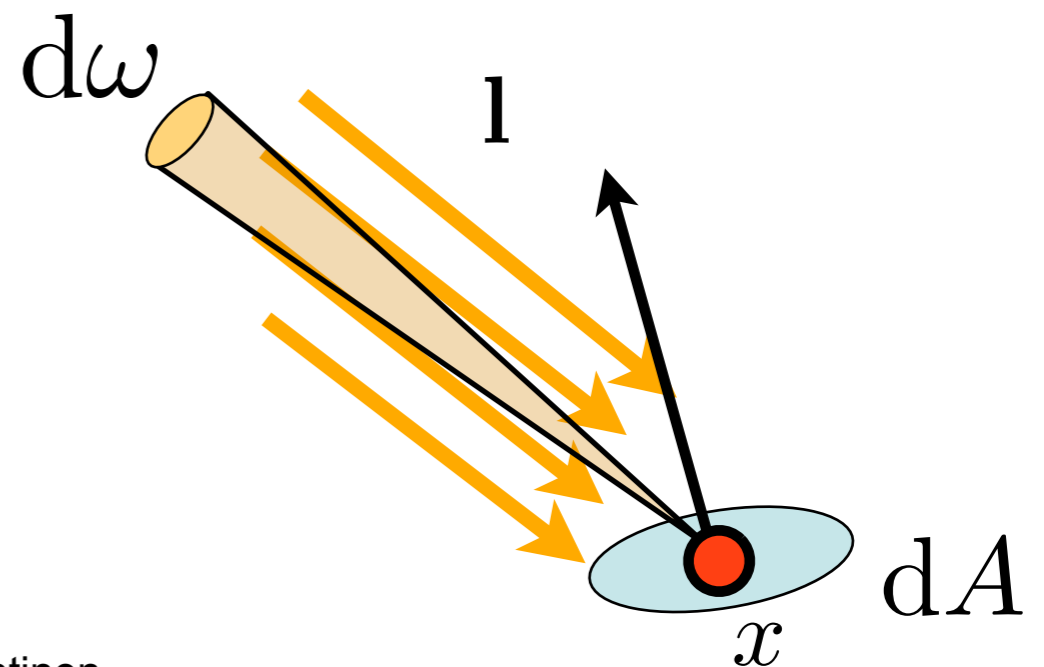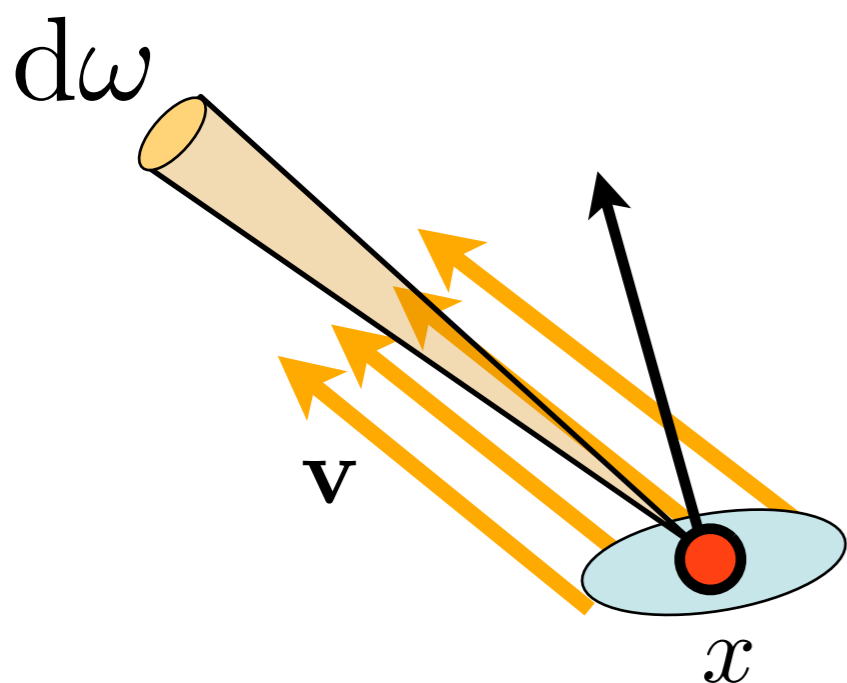

Recap: Irradiance


- Integrate incident radiance times cosine over the hemisphere Ω

$$E = \int_{\Omega} L(\omega) \cos \theta \, d\omega$$

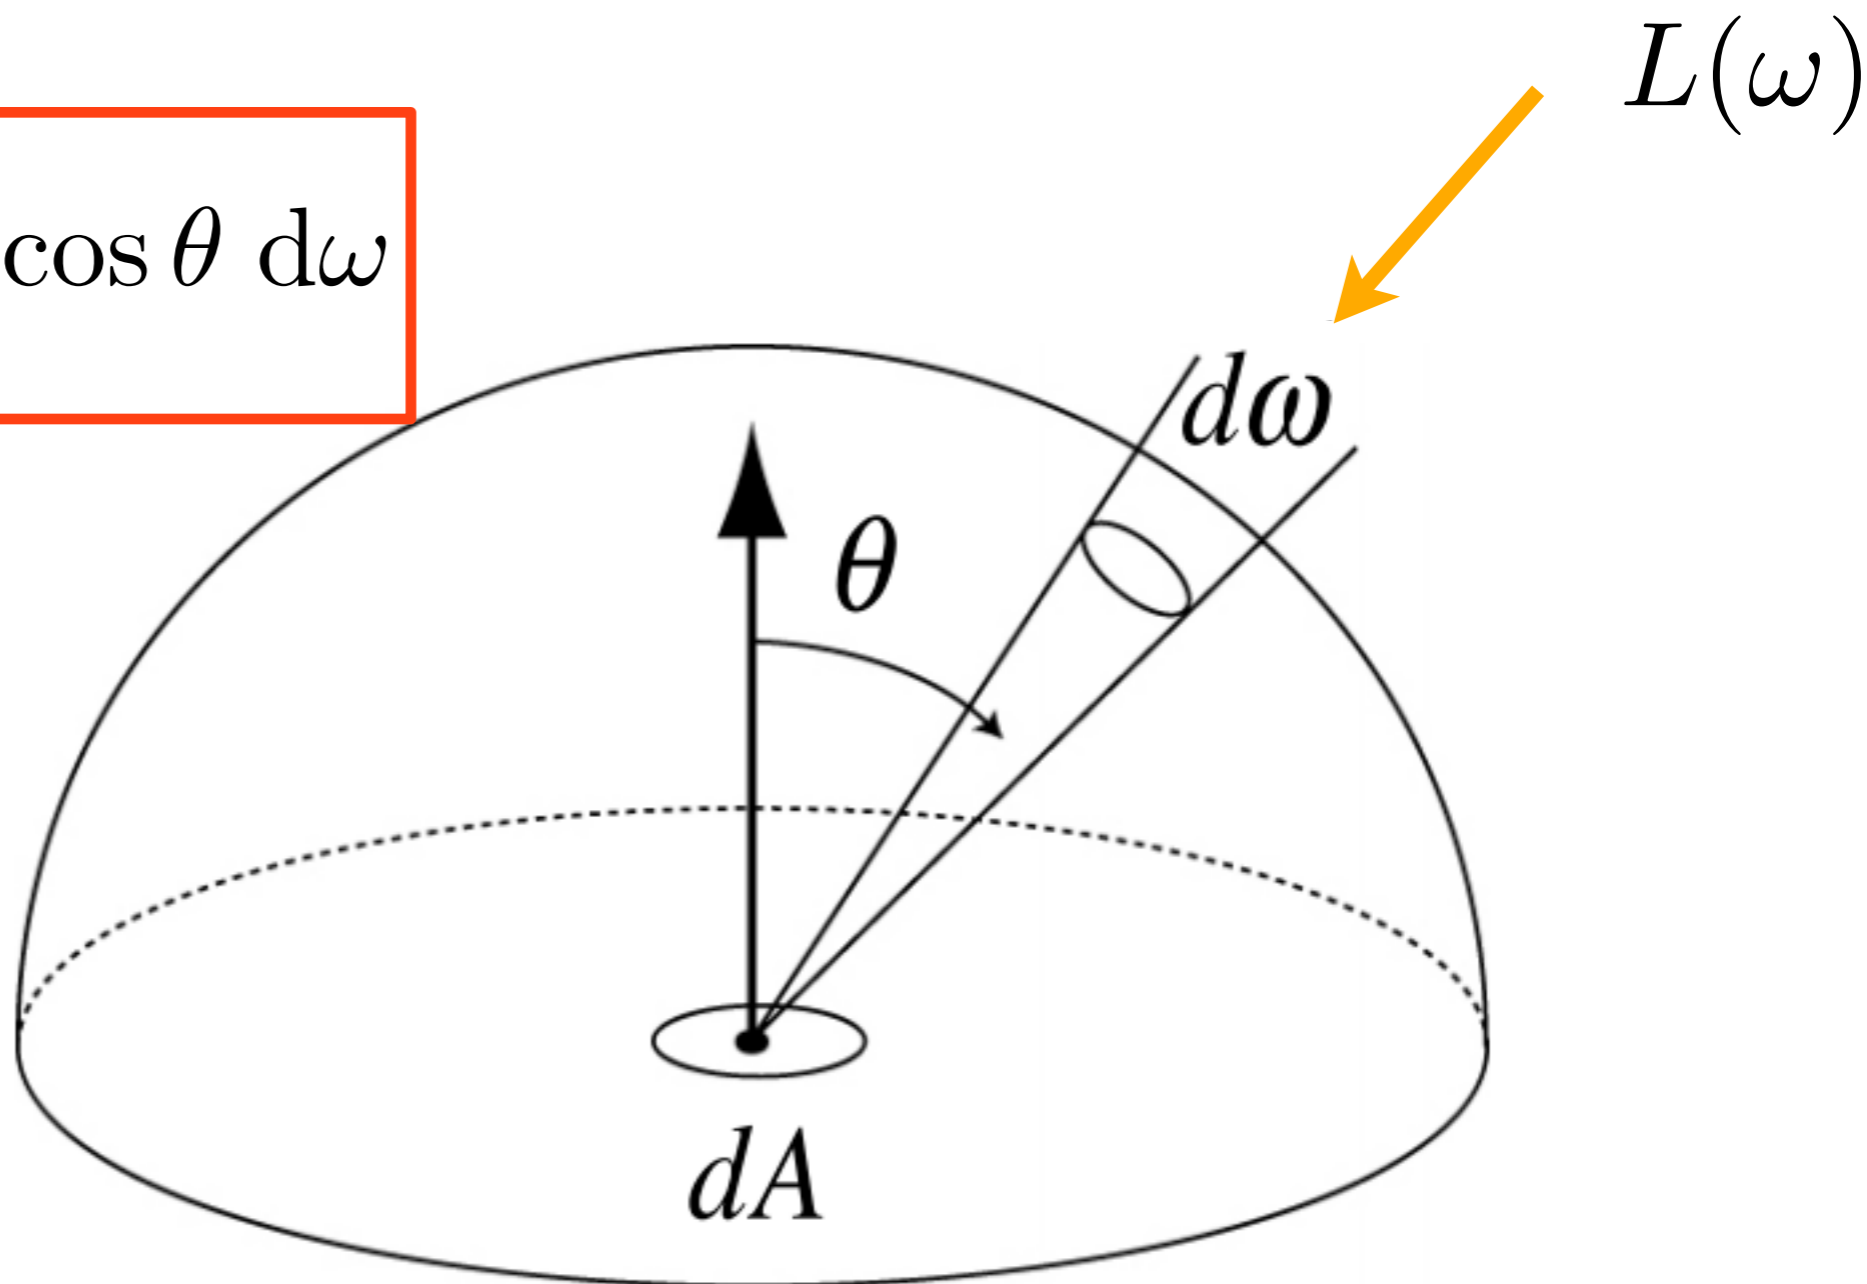

Recap: Differential Irradiance

- To measure irradiance, add up the radiance from all the differential beams from all directions

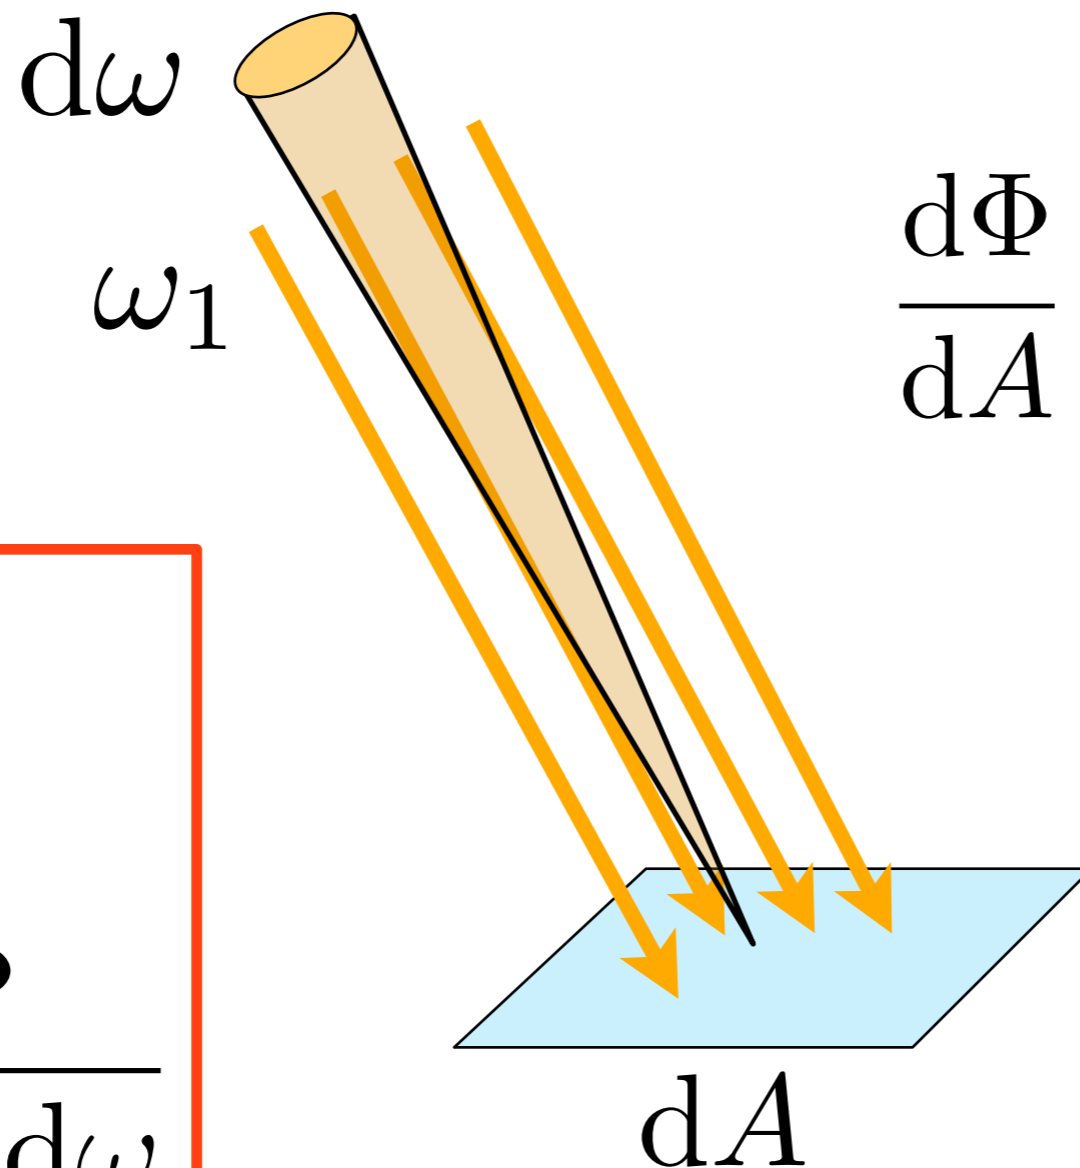



$$\frac{d\Phi}{dA} = \underbrace{L(\omega_1) \cos \theta}_{\text{Differential irradiance}} d\omega$$

Differential irradiance


$$E = \frac{d\Phi}{dA}$$

$$L = \frac{d\Phi}{dA^\perp d\omega}$$

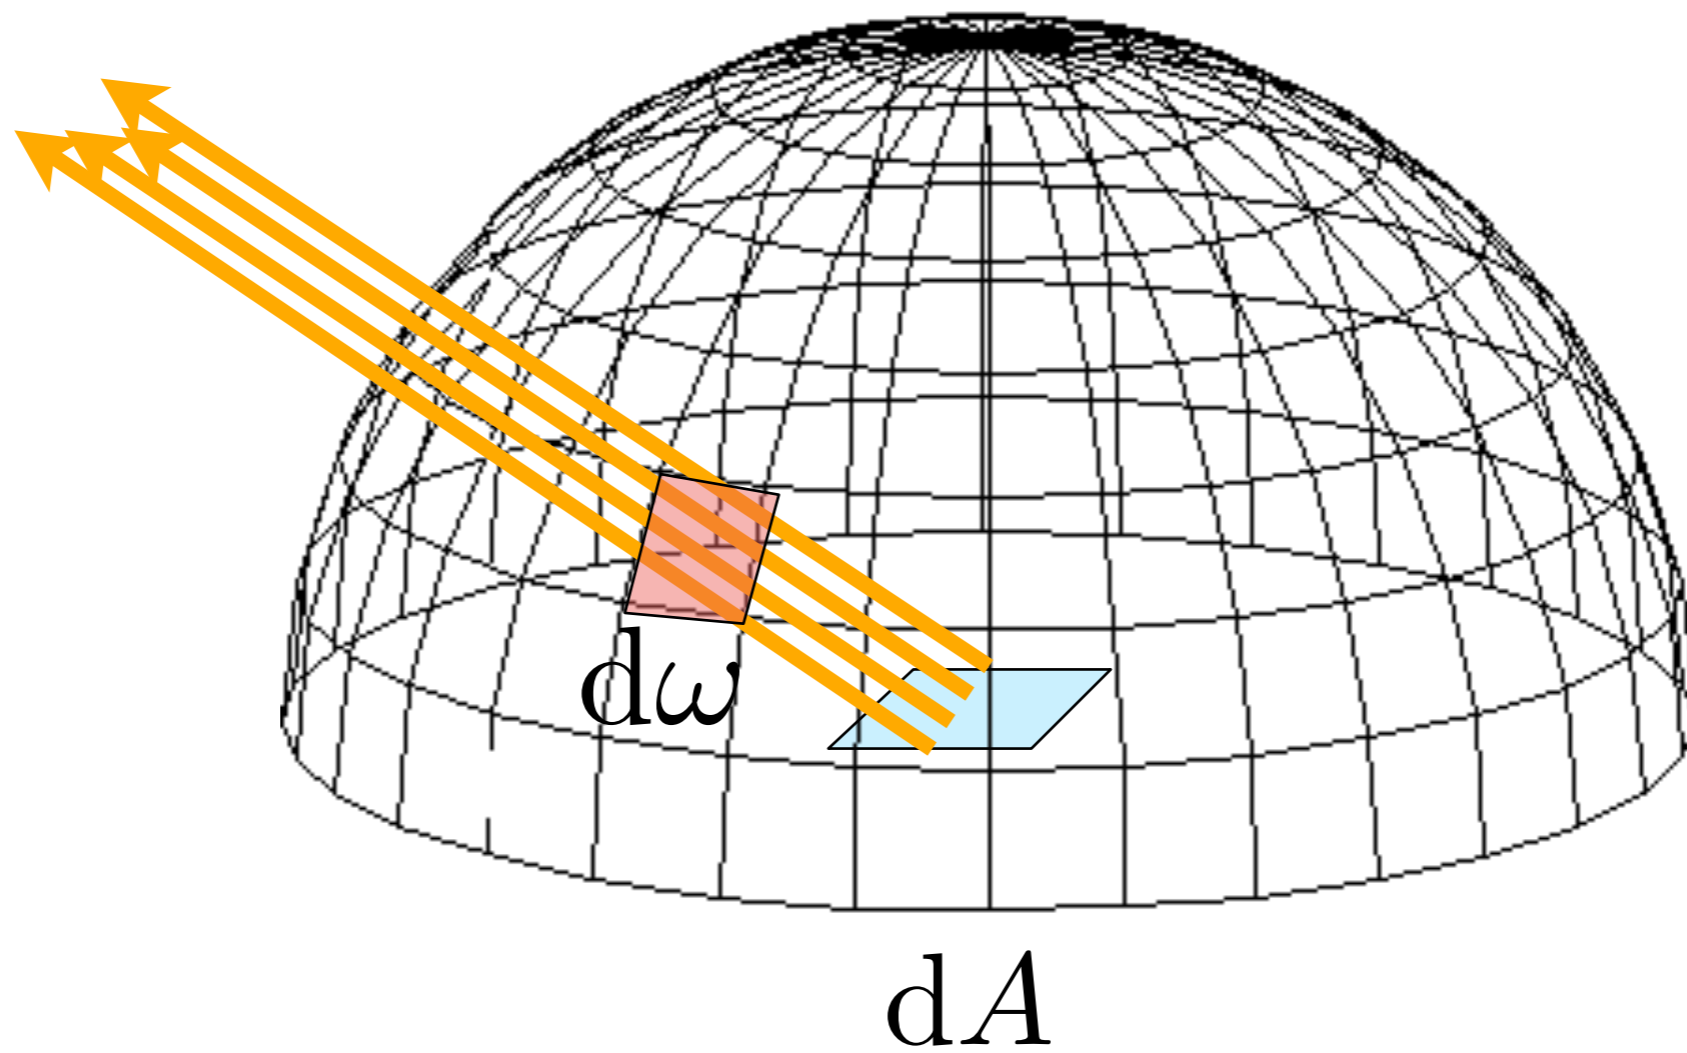

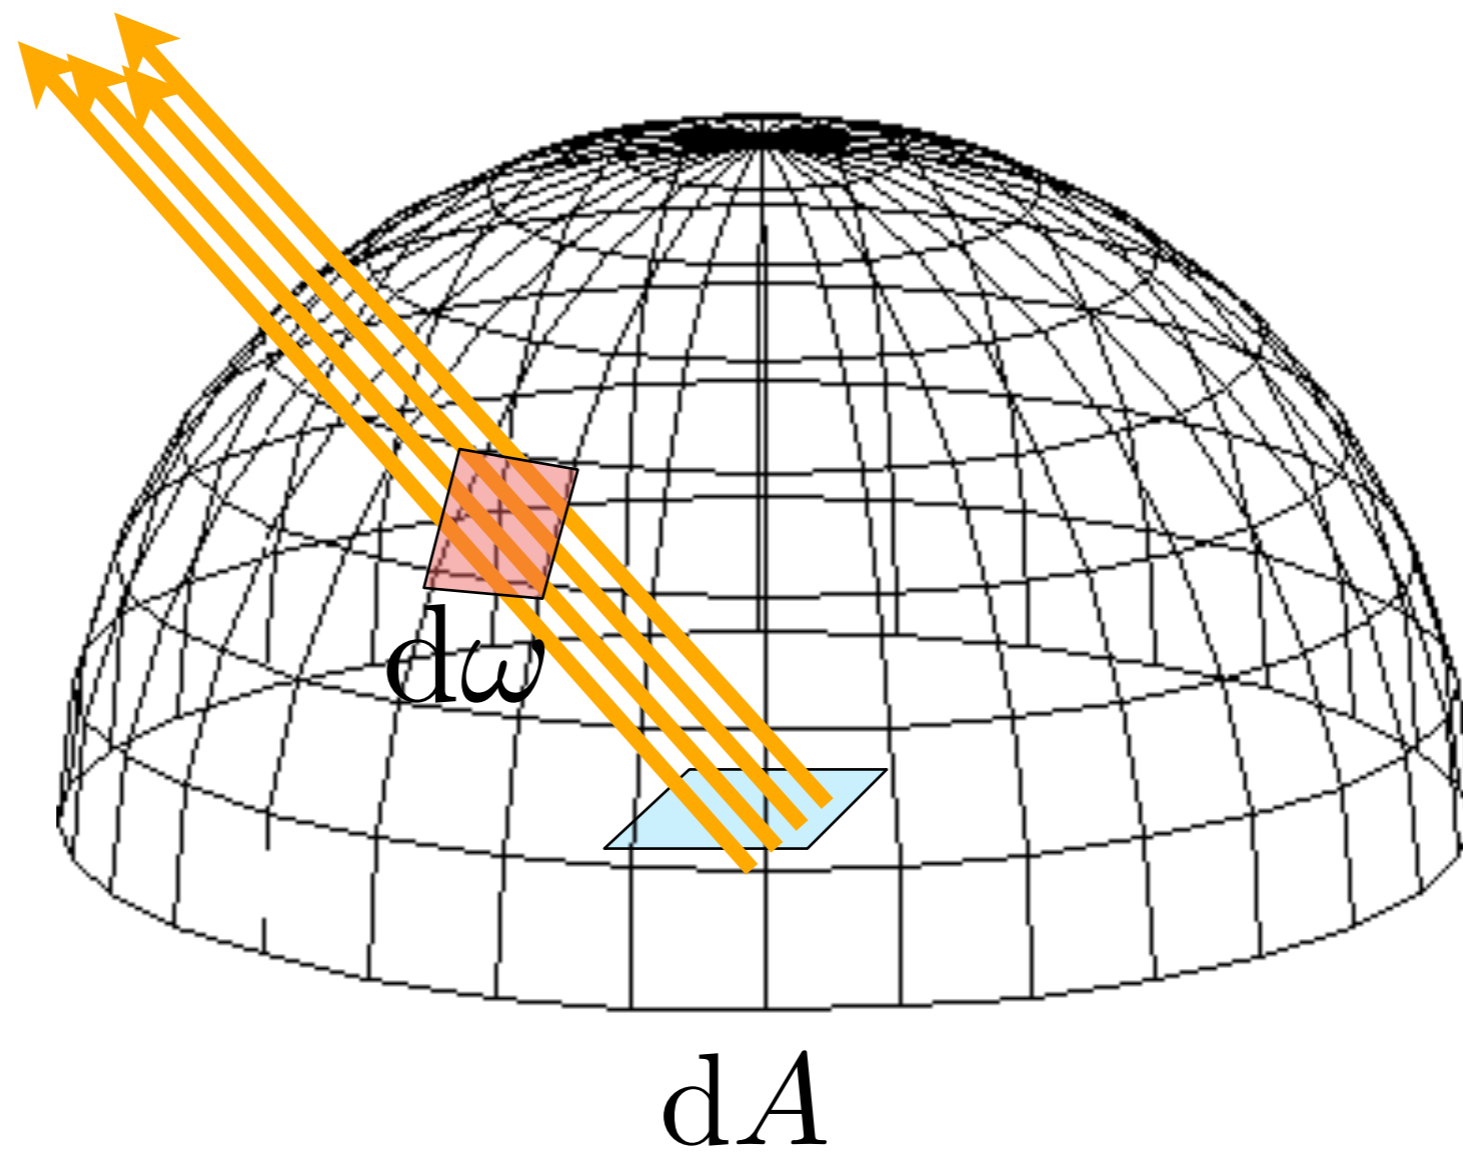

• ...

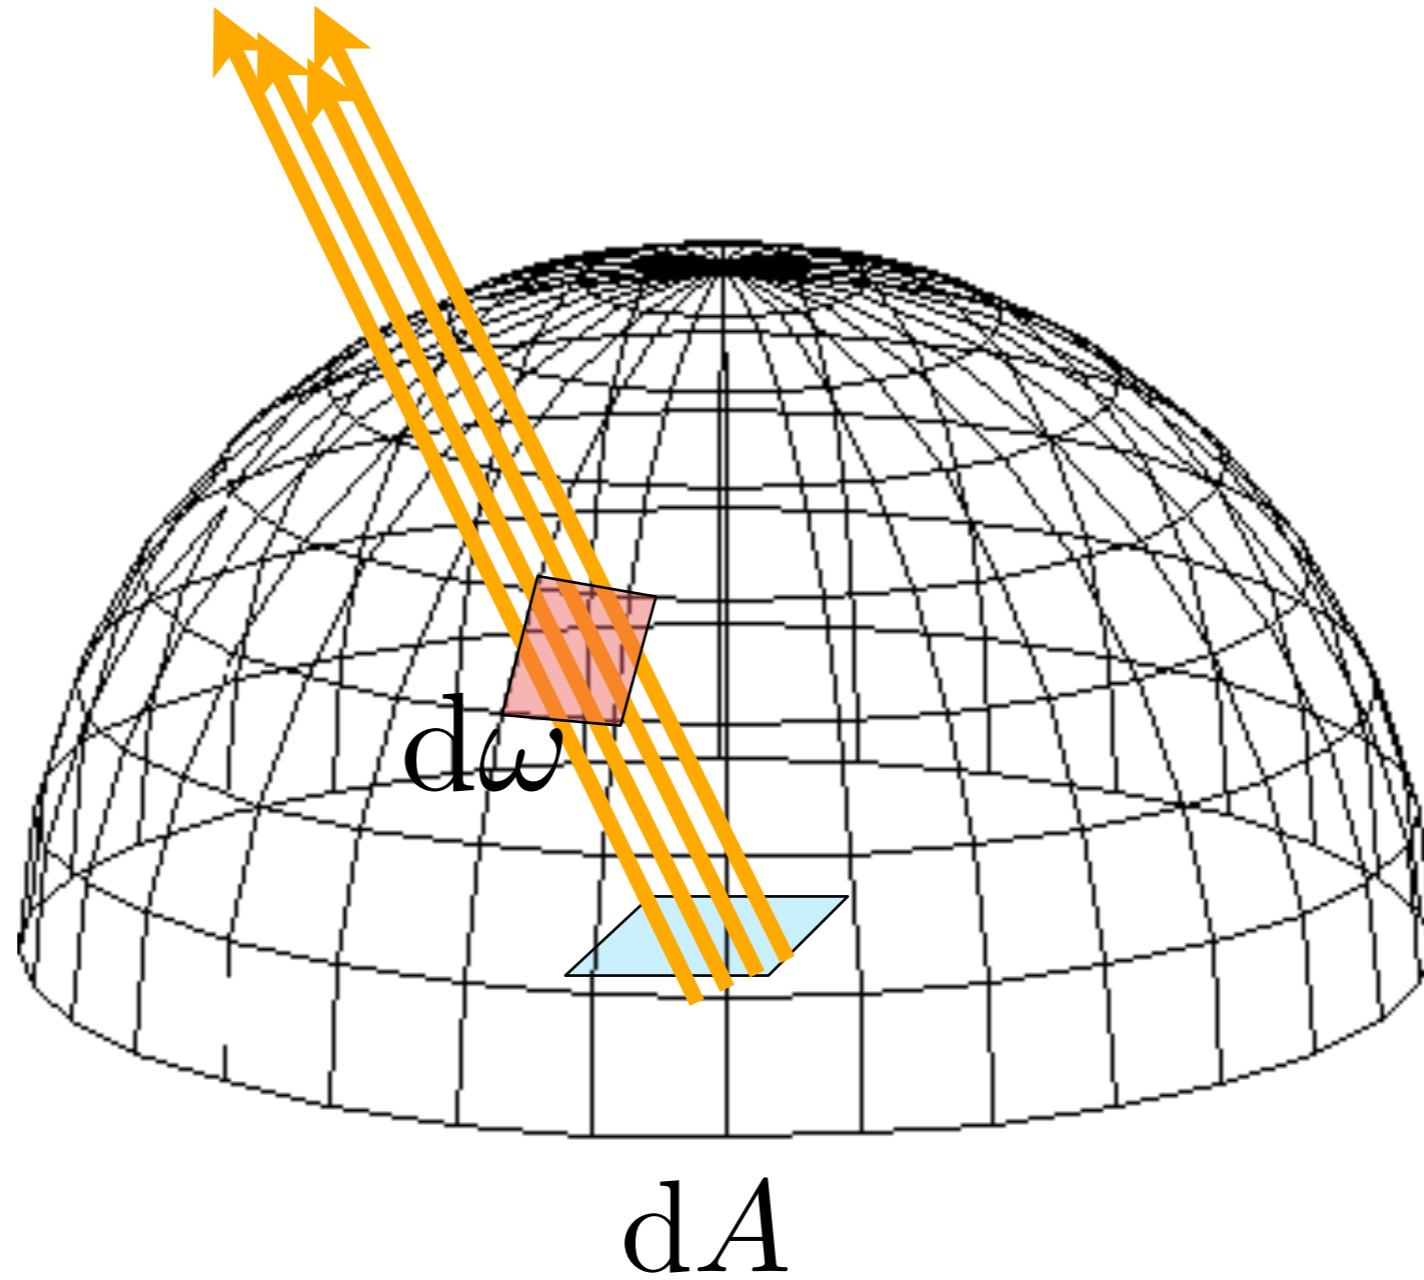

Recap: Irradiance to Radiosity

- The reflectivity of a diffuse surface is determined by its *albedo* $\rho \in [0, 1)$
 - This is the “diffuse color k_d ” from your ray tracer in 4310
- The flux emitted by a diffuse surface per unit area is called *radiosity* B
 - Same units as irradiance, $[B] = [W/m^2]$
 - Hence

$$B = \frac{\rho E}{\pi}$$

Recap: Lambertian Soft Shadows


differential
solid angle

$$L_{\text{out}}(x) = \frac{\rho(x)}{\pi} \int_{\Omega} L_{\text{in}}(x, \omega) \cos \theta \, d\omega$$

outgoing light
(diffuse =>
independent of
direction v)

albedo/pi

incident radiance cosine
term

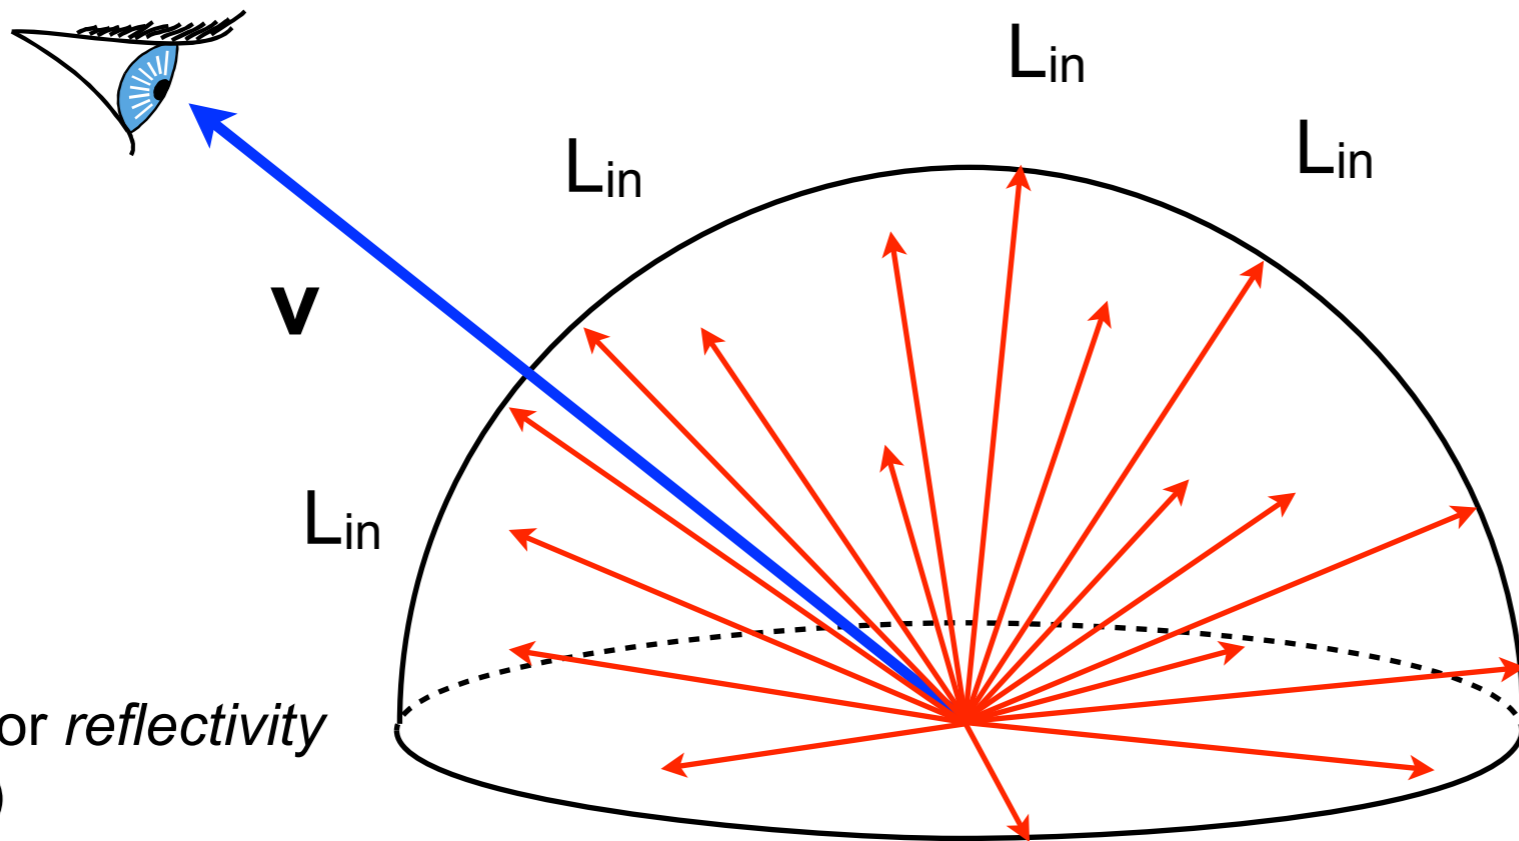


Sum (integrate)
over every
direction on the
hemisphere,
modulate incident
illumination by
cosine, albedo/pi

$\rho(x)$

is the albedo or *reflectivity*
(between 0,1)
of the surface at x


Last Time: Diffuse Reflectance Only

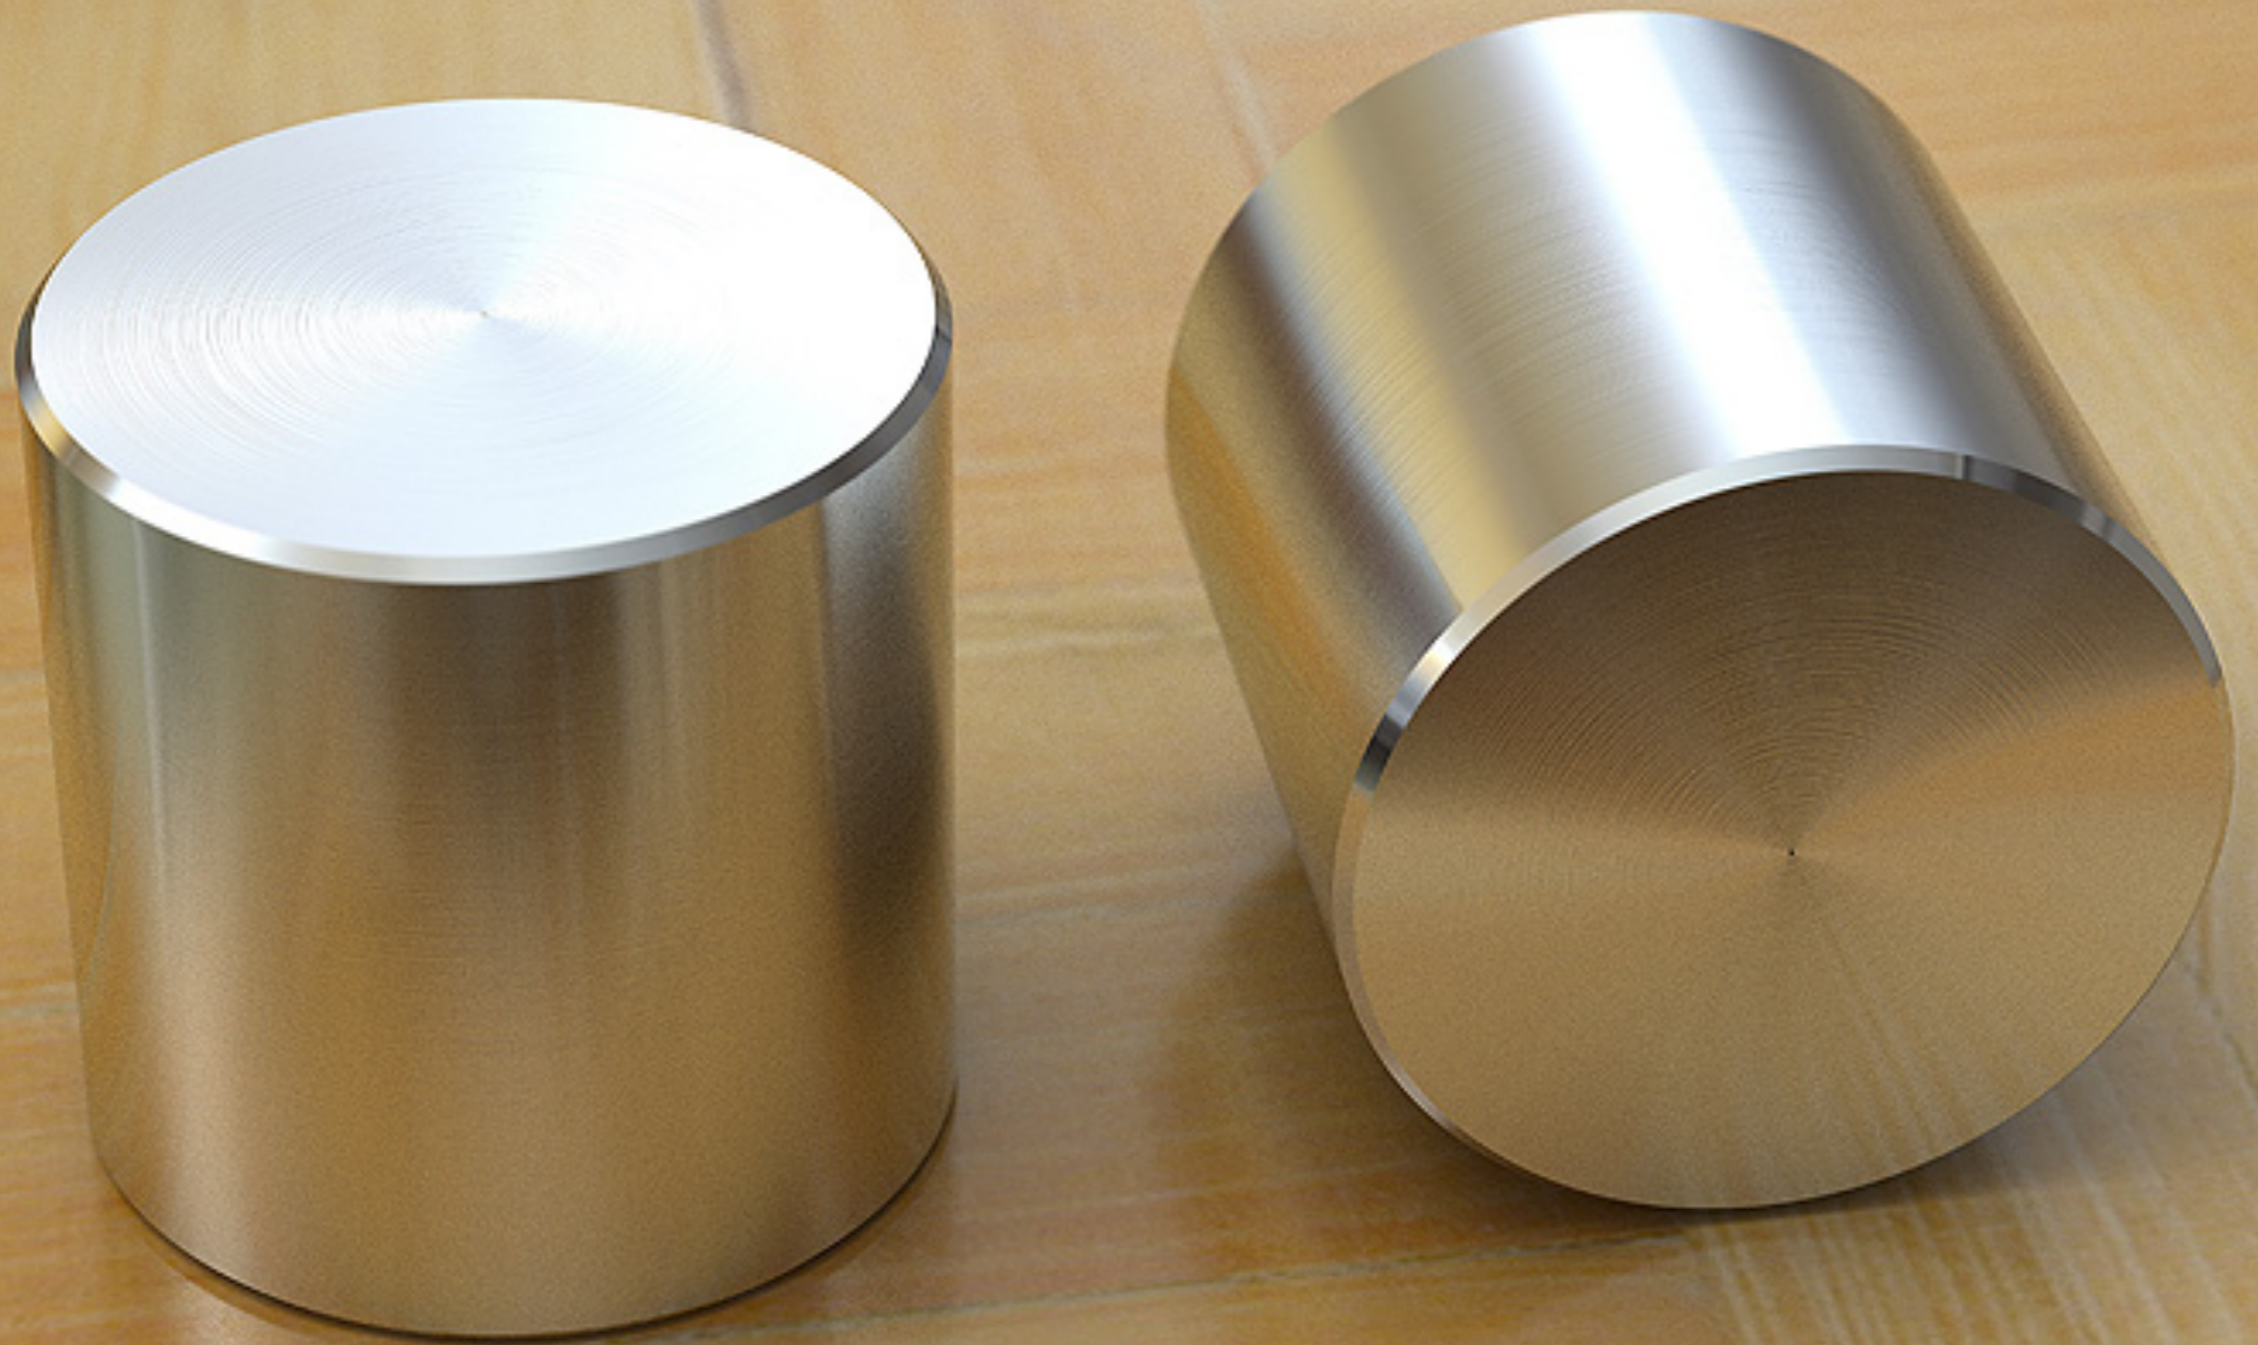

None of these surfaces are diffuse!


Quantifying Reflection – BRDF

- Bidirectional Reflectance Distribution Function
- “Ratio of light coming from one direction that gets reflected in another direction”
 - Pure reflection, assumes no light scatters into the material
- Focuses on angular aspects, not spatial variation of the material
- **How many dimensions?**

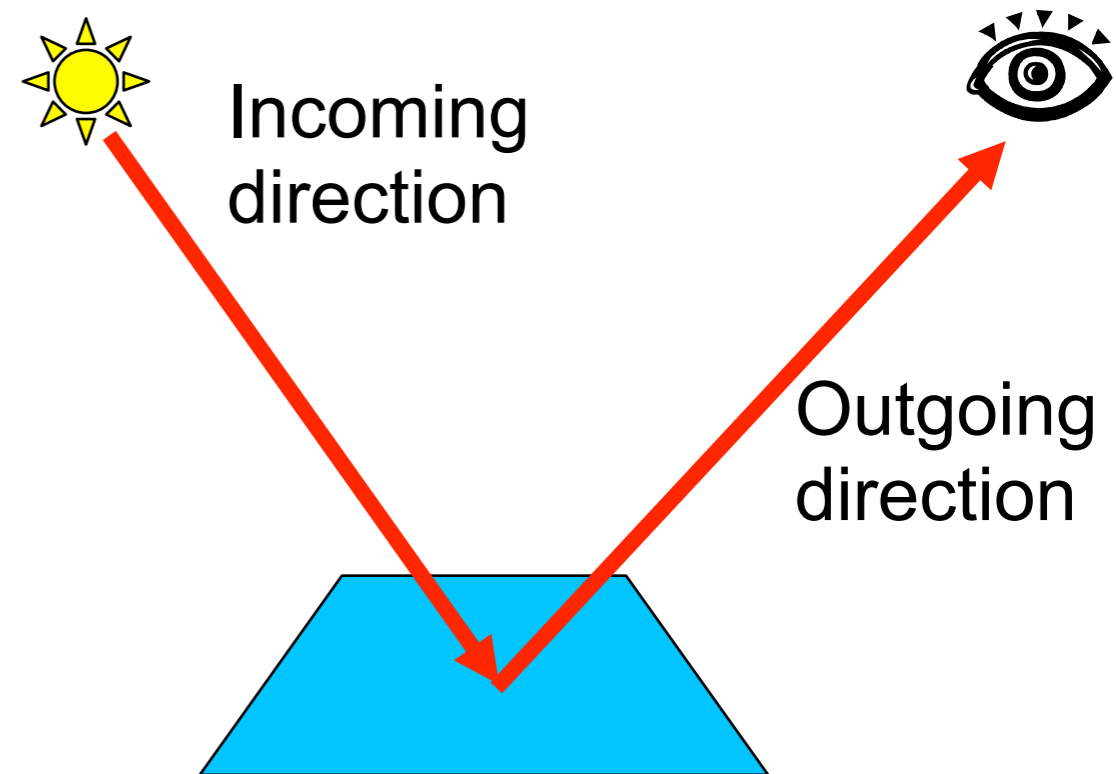



BRDF f_r

- Bidirectional Reflectance Distribution Function
 - 4D: 2 angles for each direction
 - $\text{BRDF} = f_r(\theta_i, \phi_i; \theta_o, \phi_o)$
 - Or just two unit vectors:
 $\text{BRDF} = f_r(\mathbf{l}, \mathbf{v})$
 - \mathbf{l} = light direction
 - \mathbf{v} = view direction

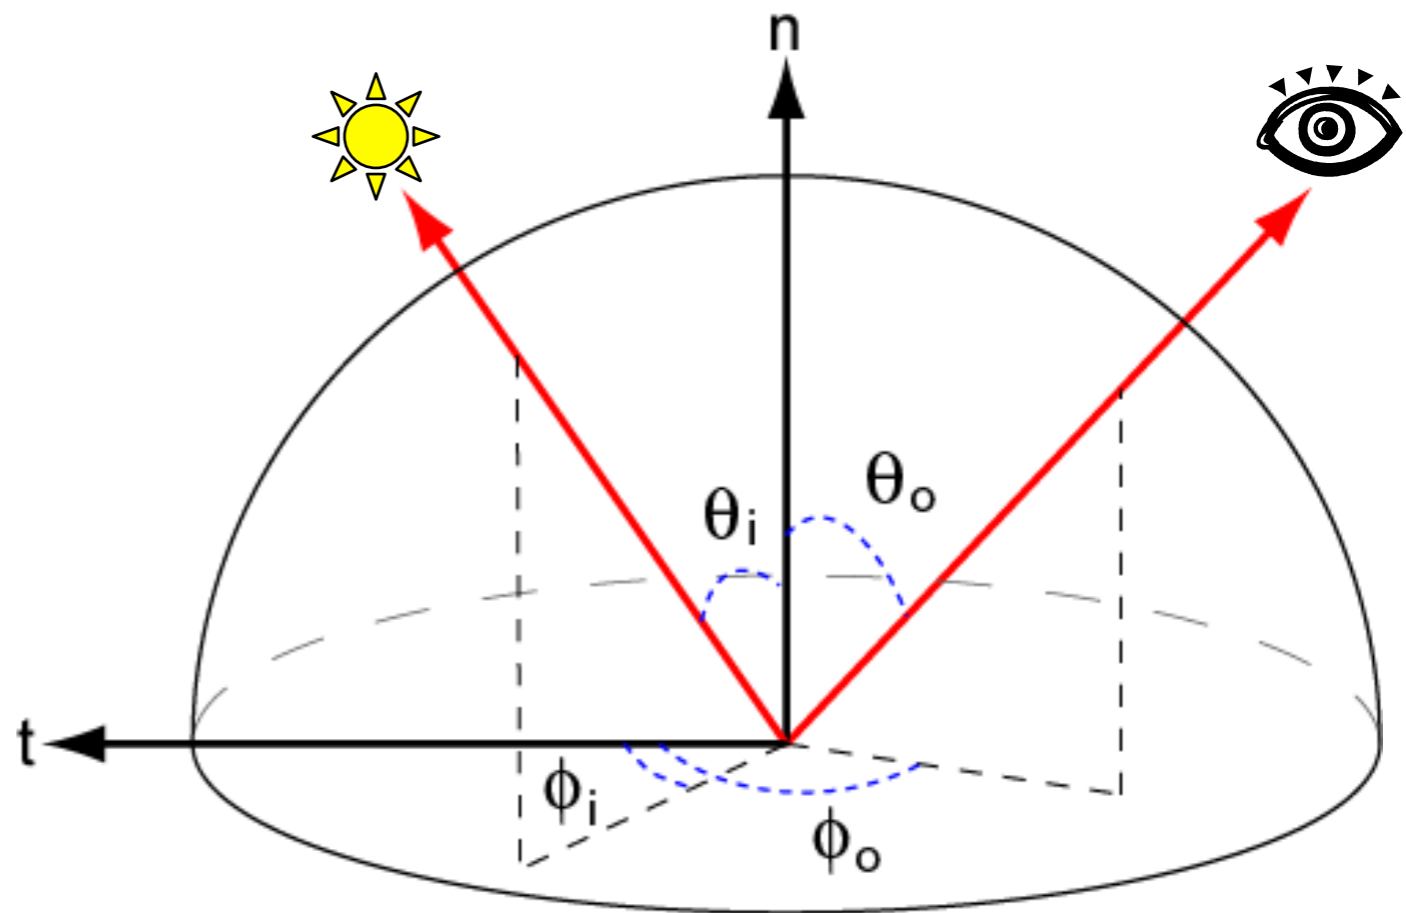

2D Slice at Constant Incidence

- For a fixed incoming direction \mathbf{l} , view dependence is a 2D spherical function
 - Here a moderate glossy component towards mirror direction \mathbf{R}

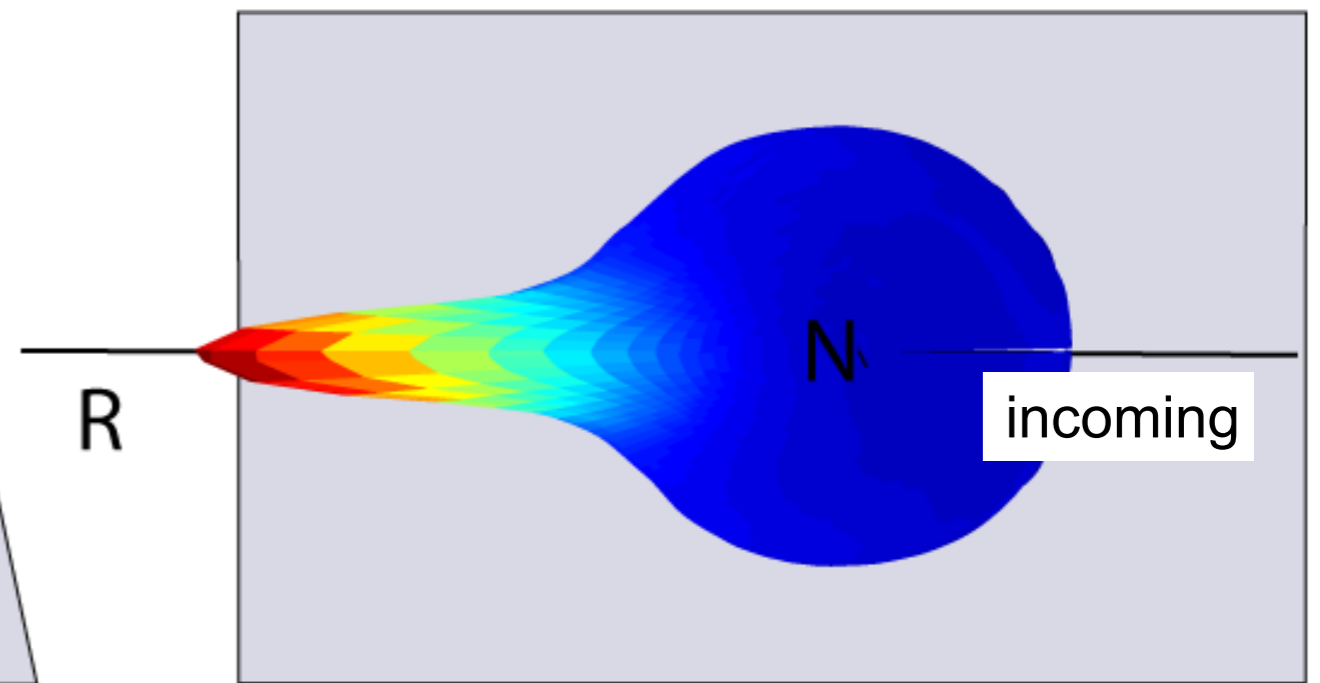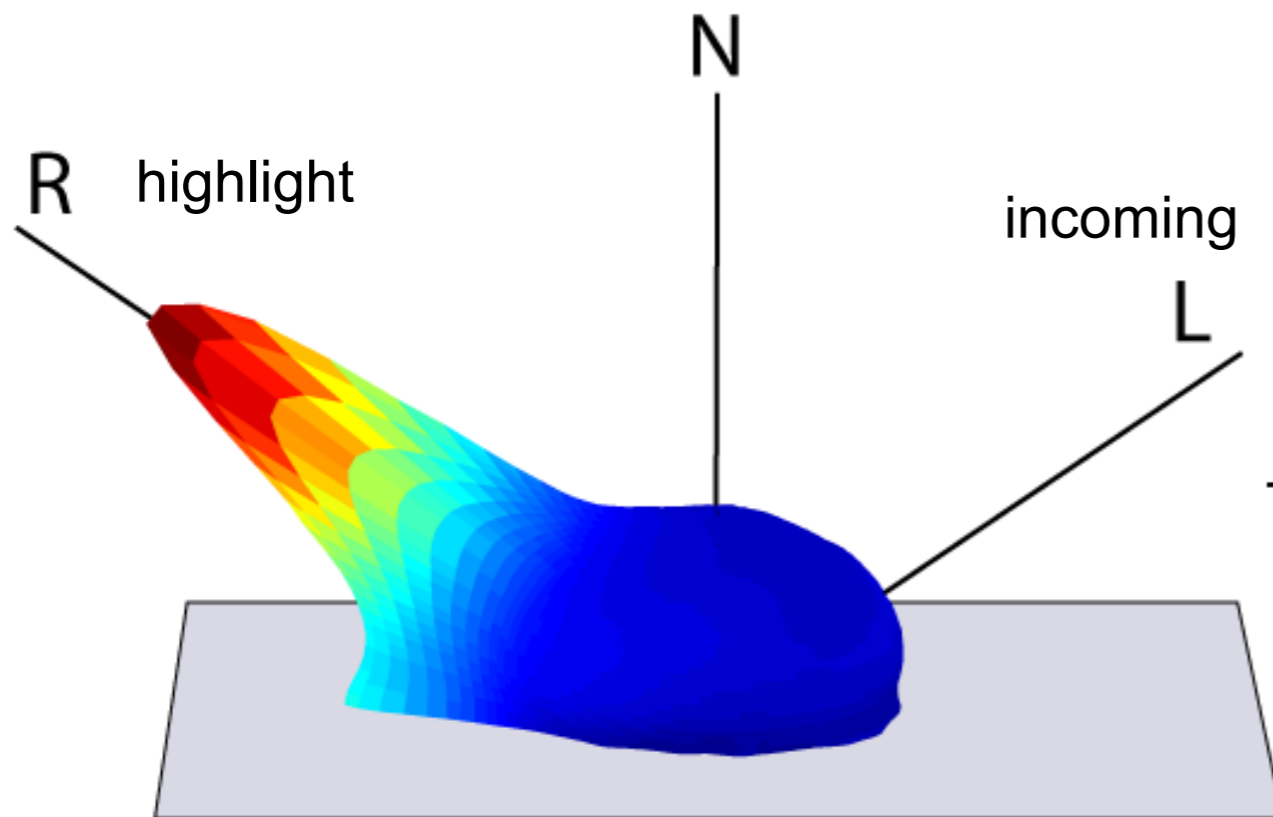


Example: Plot of "PVC" BRDF at 55° incidence

BRDF f_r

- Bidirectional Reflectance Distribution Function
 - 4D: 2 angles for each direction
 - $\text{BRDF} = f_r(\theta_i, \phi_i; \theta_o, \phi_o)$
 - Or just two unit vectors:
 $\text{BRDF} = f_r(\mathbf{l}, \mathbf{v})$
 - \mathbf{l} = light direction
 - \mathbf{v} = view direction
 - The BRDF is aligned with the surface; the vectors \mathbf{l} and \mathbf{v} must be in a local coordinate system

Mirror BRDF:
Infinitely thin and tall
spike (“Dirac delta”)
in mirror direction

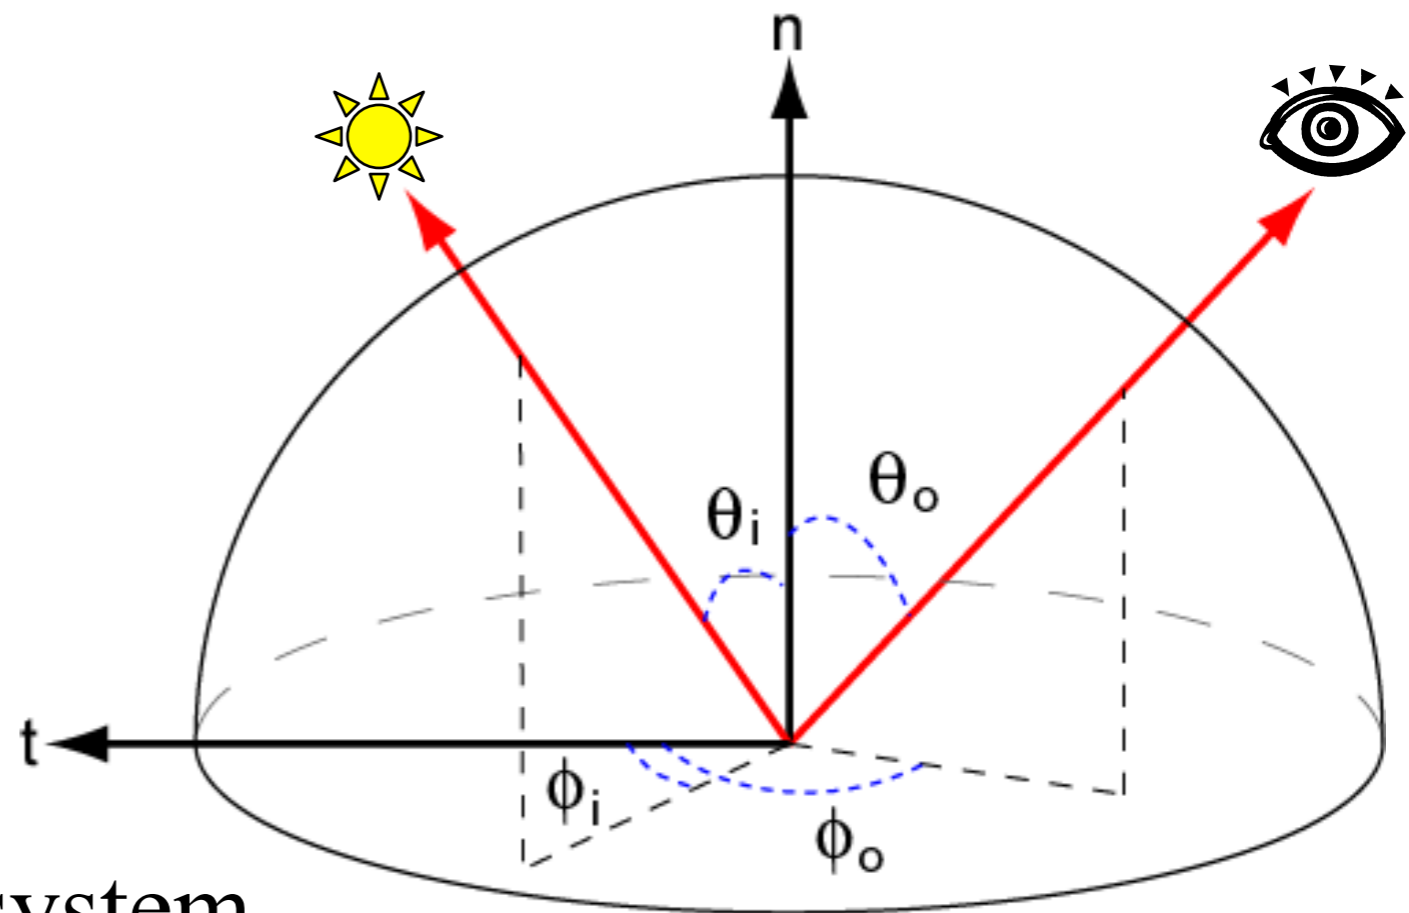

BRDF Definition, For Real This Time

- Relates **incident differential irradiance** from every direction to **outgoing radiance**

$$\text{BRDF}(\mathbf{l}, \mathbf{v}) = \frac{\text{radiance to direction } \mathbf{l}}{\text{differential irradiance from direction } \mathbf{v}}$$

BRDF Definition, For Real This Time

- Relates **incident differential irradiance** from every direction to **outgoing radiance**

$$\text{BRDF}(\mathbf{l}, \mathbf{v}) = \frac{\text{radiance to direction } \mathbf{v}}{\text{differential irradiance from direction } \mathbf{l}}$$

How are we going to use this in order to compute reflected radiance that accounts for light coming in from every direction?

Reflectance Equation

$$L(x \rightarrow \mathbf{v}) = \leftarrow \text{outgoing radiance}$$


$$\int_{\Omega} f_r(x, \mathbf{l} \rightarrow \mathbf{v}) L(x \leftarrow \mathbf{l}) \cos \theta \, d\mathbf{l} \quad \text{incident differential irradiance}$$

integral over hemisphere

BRDF

incoming radiance

cosine of incident angle

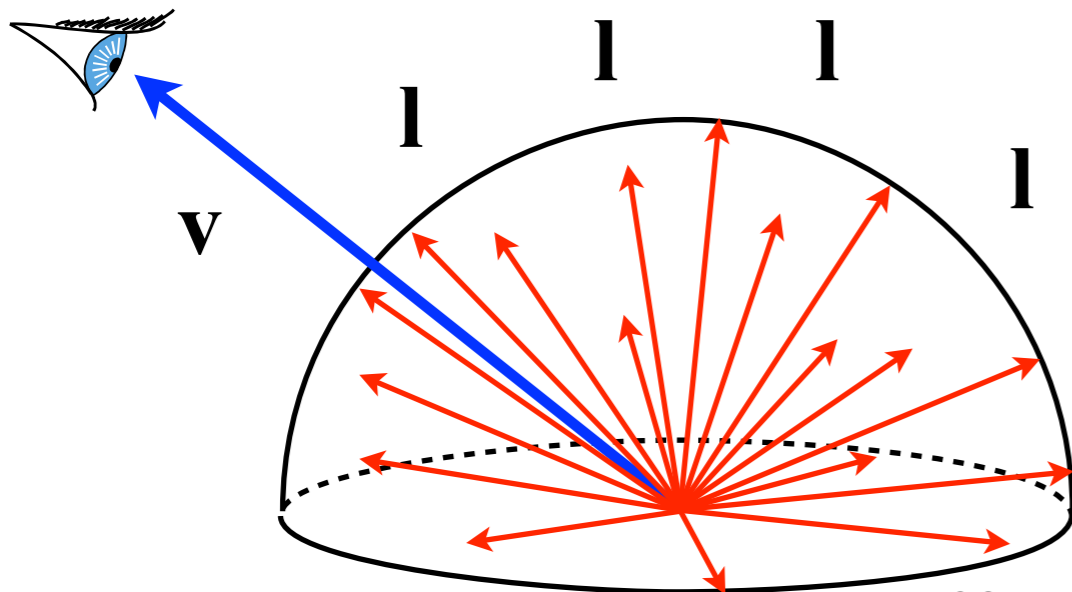


Reflectance Equation

$$L(x \rightarrow \mathbf{v}) = \leftarrow \text{outgoing radiance}$$

$$\int_{\Omega} f_r(x, \mathbf{l} \rightarrow \mathbf{v}) L(x \leftarrow \mathbf{l}) \cos \theta \, d\mathbf{l} \quad \text{incident differential irradiance}$$

integral over hemisphere
 BRDF
 incoming radiance
 cosine of incident angle

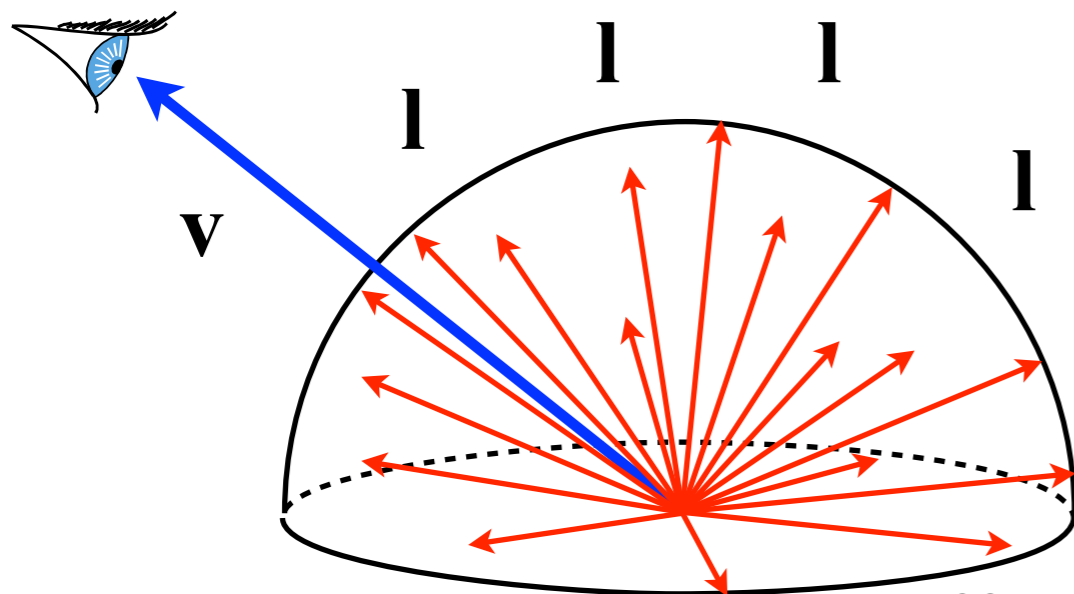


$$\text{BRDF}(\mathbf{l}, \mathbf{v}) = \frac{\text{radiance to direction } \mathbf{v}}{\text{differential irradiance from direction } \mathbf{l}}$$

Compare to Diffuse Case


$$L(x \rightarrow \mathbf{v}) =$$

$$\int_{\Omega} f_r(x, \mathbf{l} \rightarrow \mathbf{v}) L(x \leftarrow \mathbf{l}) \cos \theta \, d\mathbf{l}$$

incident
differential
irradiance



BRDF



$$L_{\text{out}}(x) = \frac{\rho(x)}{\pi} \int_{\Omega} L_{\text{in}}(x, \omega) \cos \theta \, d\omega$$

Diffuse BRDF

$$L_{\text{out}}(x) = \frac{\rho(x)}{\pi} \int_{\Omega} L_{\text{in}}(x, \omega) \cos \theta \, d\omega$$

- Diffuse reflectance independent of outgoing angle
- Hence, the diffuse BRDF is

$$f_r(x) = \frac{\rho}{\pi}$$

– (ρ is the albedo, remember)

- Note: no cosine, it's included in the reflectance eq.!

BRDF Properties

- Reciprocity: $f_r(\mathbf{l} \rightarrow \mathbf{v}) = f_r(\mathbf{v} \rightarrow \mathbf{l})$

- Energy conservation: $\int f_r(\mathbf{l} \rightarrow \mathbf{v}) \cos \theta_v \, d\mathbf{v} \leq 1$

- **Intuitive:** the BRDF tells you how a single beam of incident illumination from direction \mathbf{l} is spread into all reflected directions \mathbf{v} ; you can't have more energy coming out than going in.

- **Note:** This *does not imply* $f_r(\mathbf{l} \rightarrow \mathbf{v}) \leq 1$!!

- It's an “unnormalised density”

BRDF Properties


- Reciprocity: $f_r(\mathbf{l} \rightarrow \mathbf{v}) = f_r(\mathbf{v} \rightarrow \mathbf{l})$
- Energy conservation: $\int f_r(\mathbf{l} \rightarrow \mathbf{v}) \cos \theta_v \, d\mathbf{v} \leq 1$
 - **Intuitive:** the BRDF tells you how a single beam of incident illumination from direction \mathbf{l} is spread into all reflected directions \mathbf{v} ; you can't have more energy coming out than going in.
 - But also, due to reciprocity, the same must hold if you swap the incident and outgoing directions.
- Non-negativity: $f_r(\mathbf{l} \rightarrow \mathbf{v}) \geq 0$

Isotropic vs. Anisotropic

- When keeping \mathbf{l} and \mathbf{v} fixed, if rotation of surface around the normal doesn't change the reflection, the material is called *isotropic*
- Surfaces with strongly oriented microgeometry elements are *anisotropic*
- Examples:
 - brushed metals,
 - hair, fur, cloth, velvet



Westin et.al 92

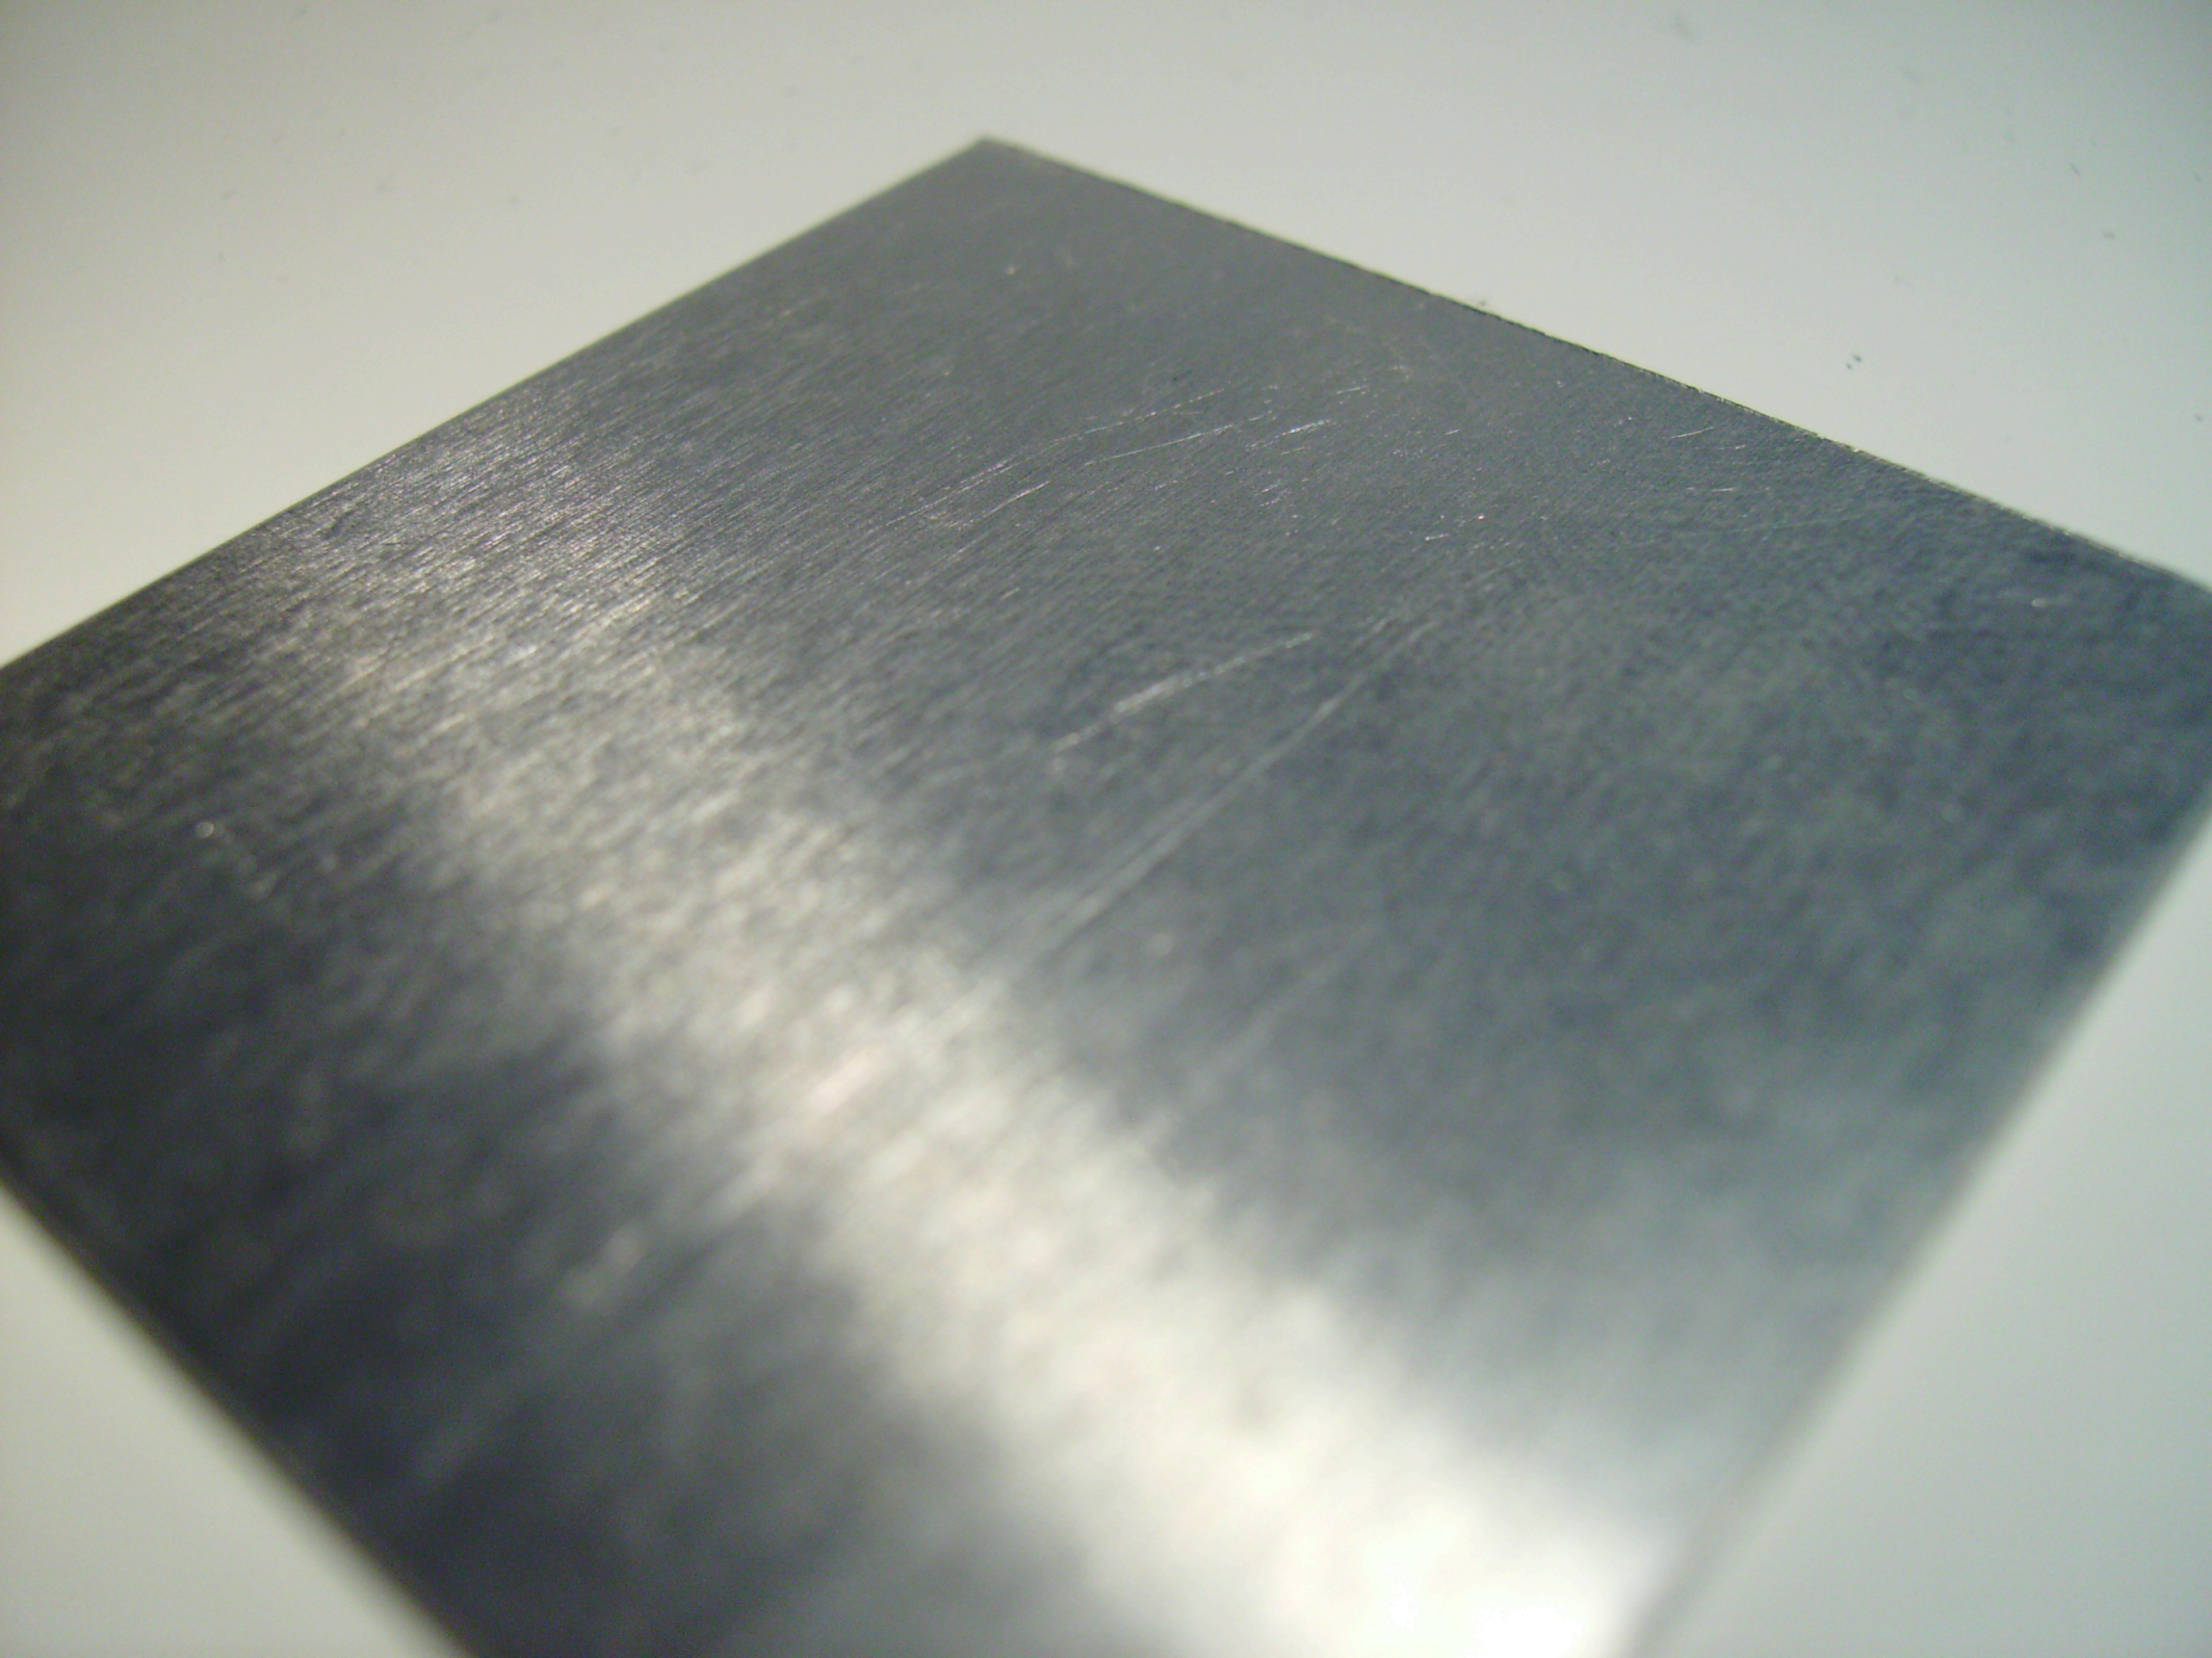


Hmmh

- The BRDF is a 4D function for a single surface point
- When you make it vary over surfaces, you add two more dimensions
 - The Spatially Varying BRDF (SVBRDF) is 6D!

Spatially Varying Reflectance

- Very, very, **VERY** important for realistic surface appearance
- **VIDEO**


Aittala, Weyrich, Lehtinen 2015

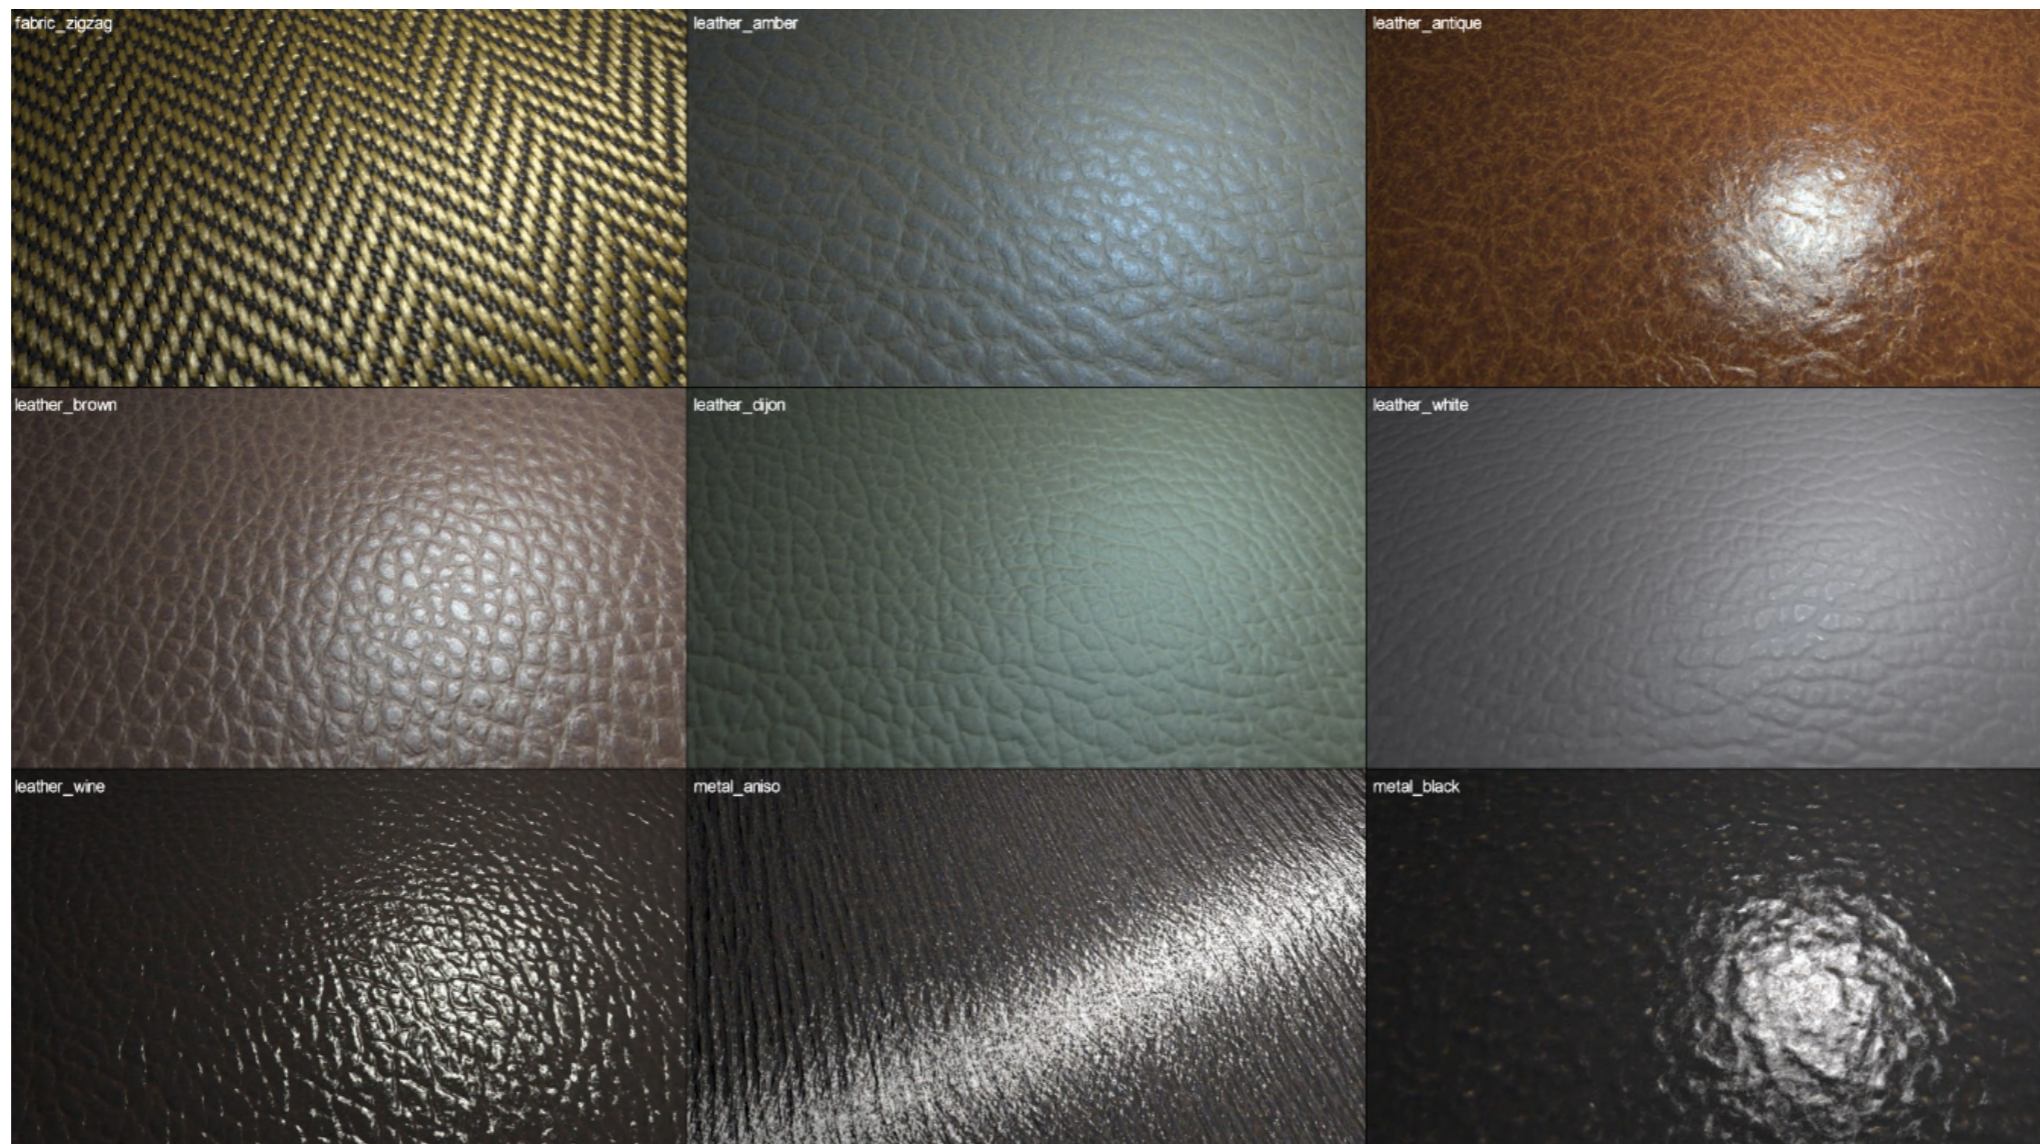

Spatially Varying Reflectance

- You can find these SVBRDF material models online and use them in your assignments!

Aittala, Weyrich, Lehtinen 2015

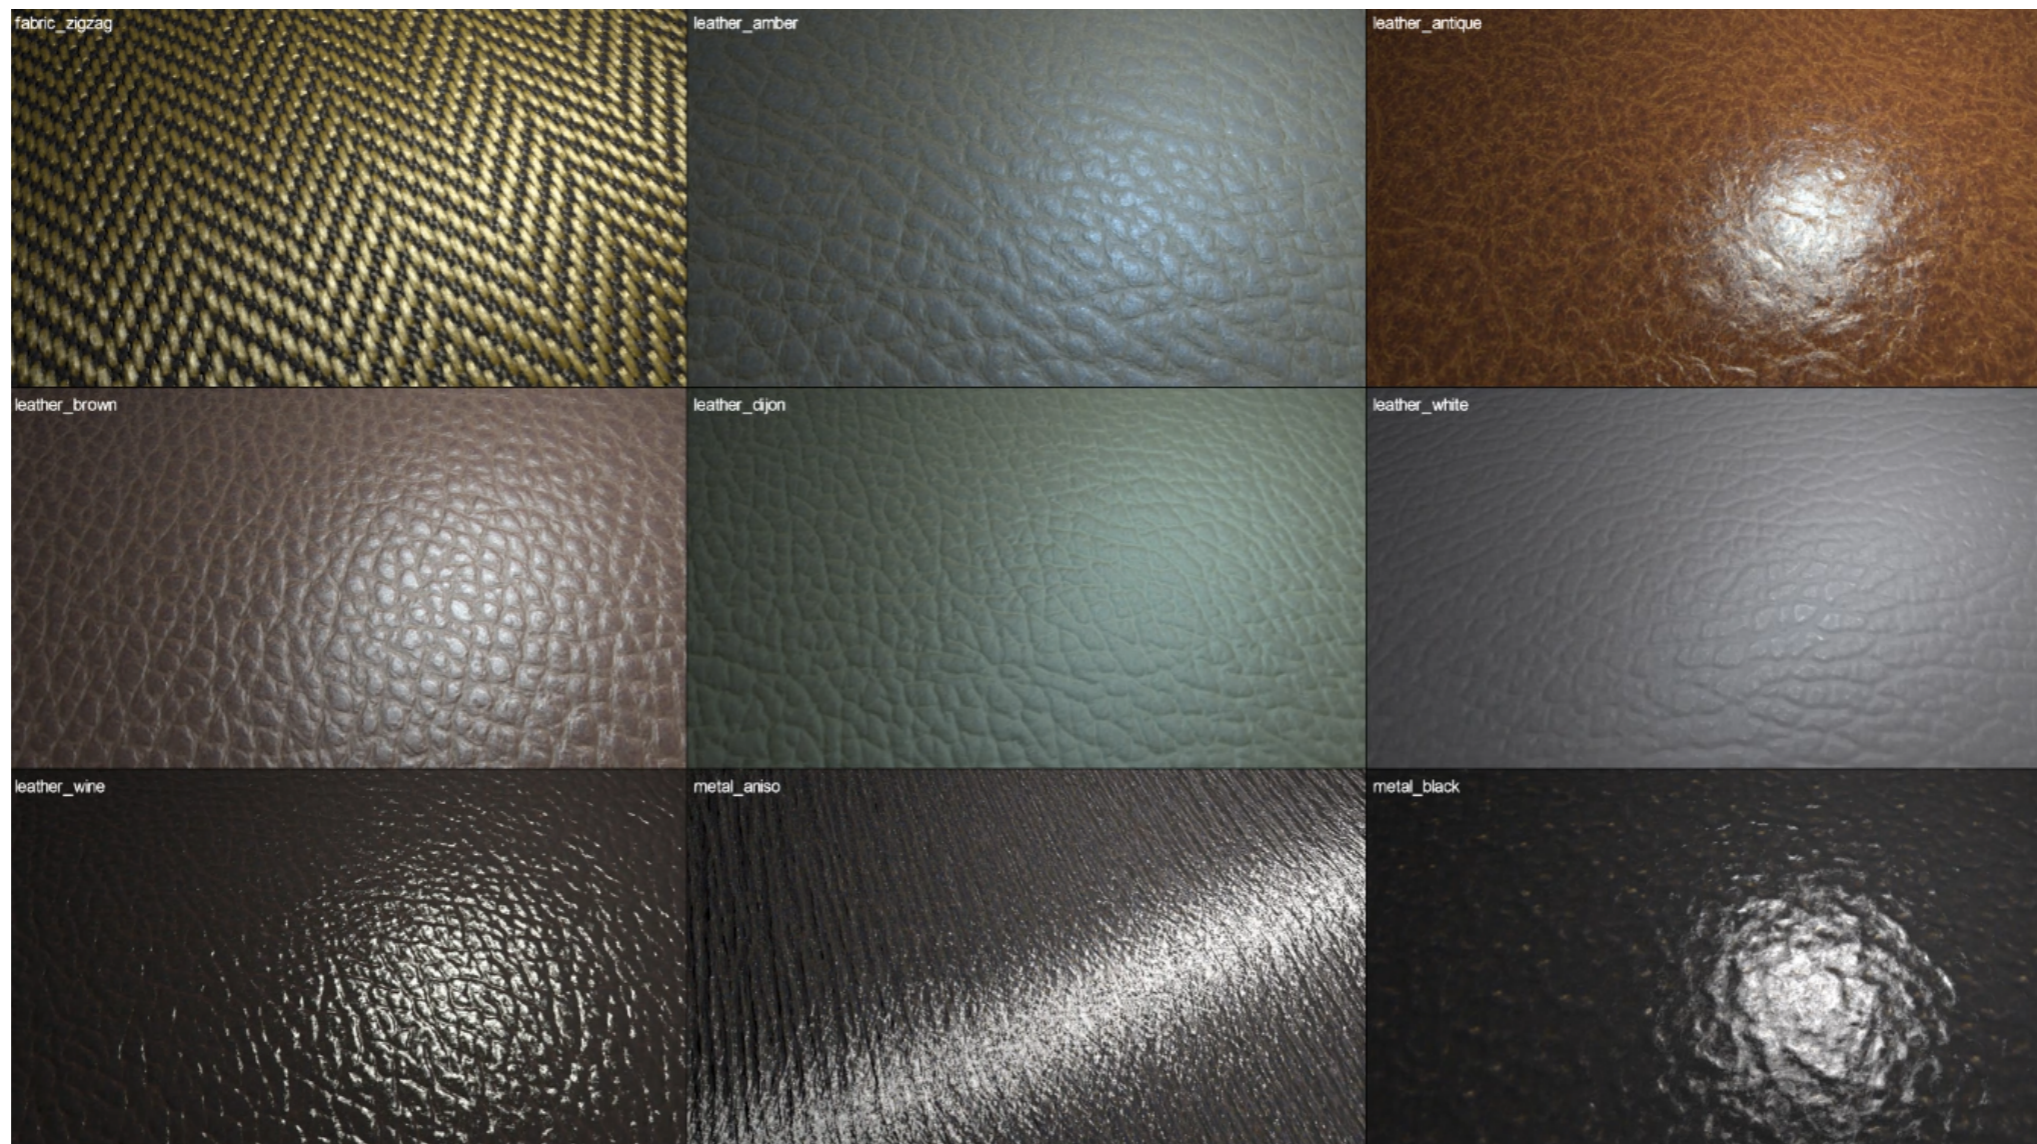

Parametric BRDF Models

- BRDFs can be measured from real data
 - But storage and computation using arbitrary 4D or 6D functions is unwieldy, must do something smarter

Parametric BRDF Models

- BRDFs can be measured from real data
 - But storage and computation using arbitrary 4D or 6D functions is unwieldy, must do something smarter
- **Solution: parametric models**
 - What this means: use a small set of (hopefully intuitive) parameters that determine reflectance at each point
- We've seen one model already: diffuse reflectance determined by one parameter, the albedo
 - Well, 3 actually (RGB)

Parametric BRDF Models

- Parametric BRDF models represent the relationship between incident and outgoing light by some mathematical formula with tunable parameters
 - The appearance can then be tuned by setting parameters
 - “Color”, “Shininess”, “anisotropy”, etc.
 - Many ways of coming up with these
 - Can model with measured data (examples later)
- Popular models: Diffuse, Blinn-Phong, Cook-Torrance, LaFortune, Ward, Oren-Nayar, etc.


Parametric SVBRDF Example



Diffuse albedo (color)



Specular albedo (color)

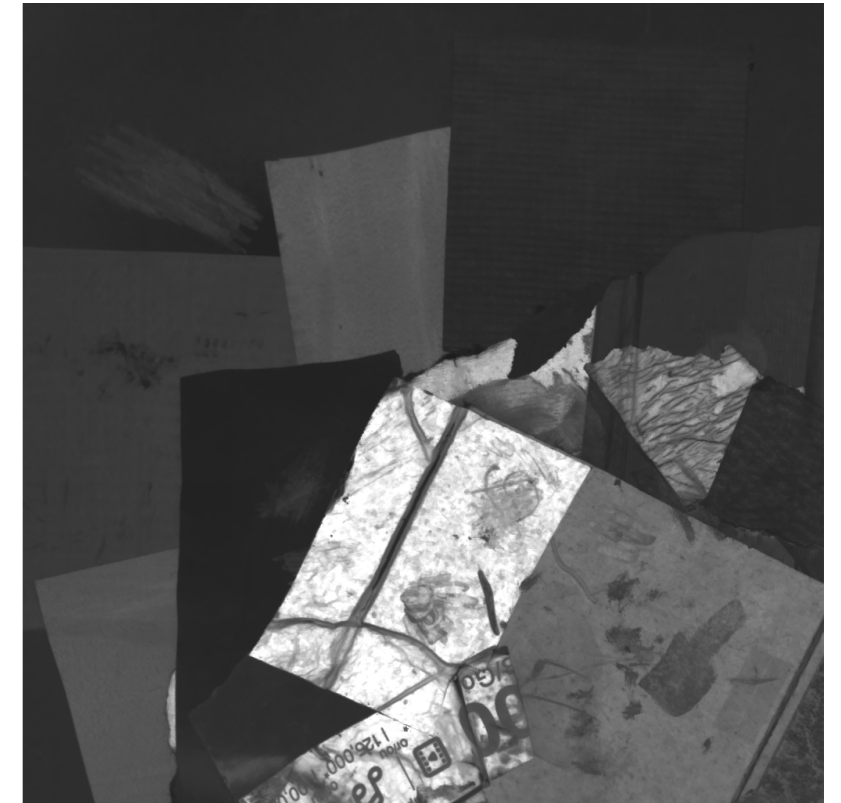

Glossiness


These are just parameters to a Fresnel-modulated Blinn-Phong model!



Surface normal

How do we obtain BRDFs?

- One possibility: Gonioreflectometer
 - 4 degrees of freedom

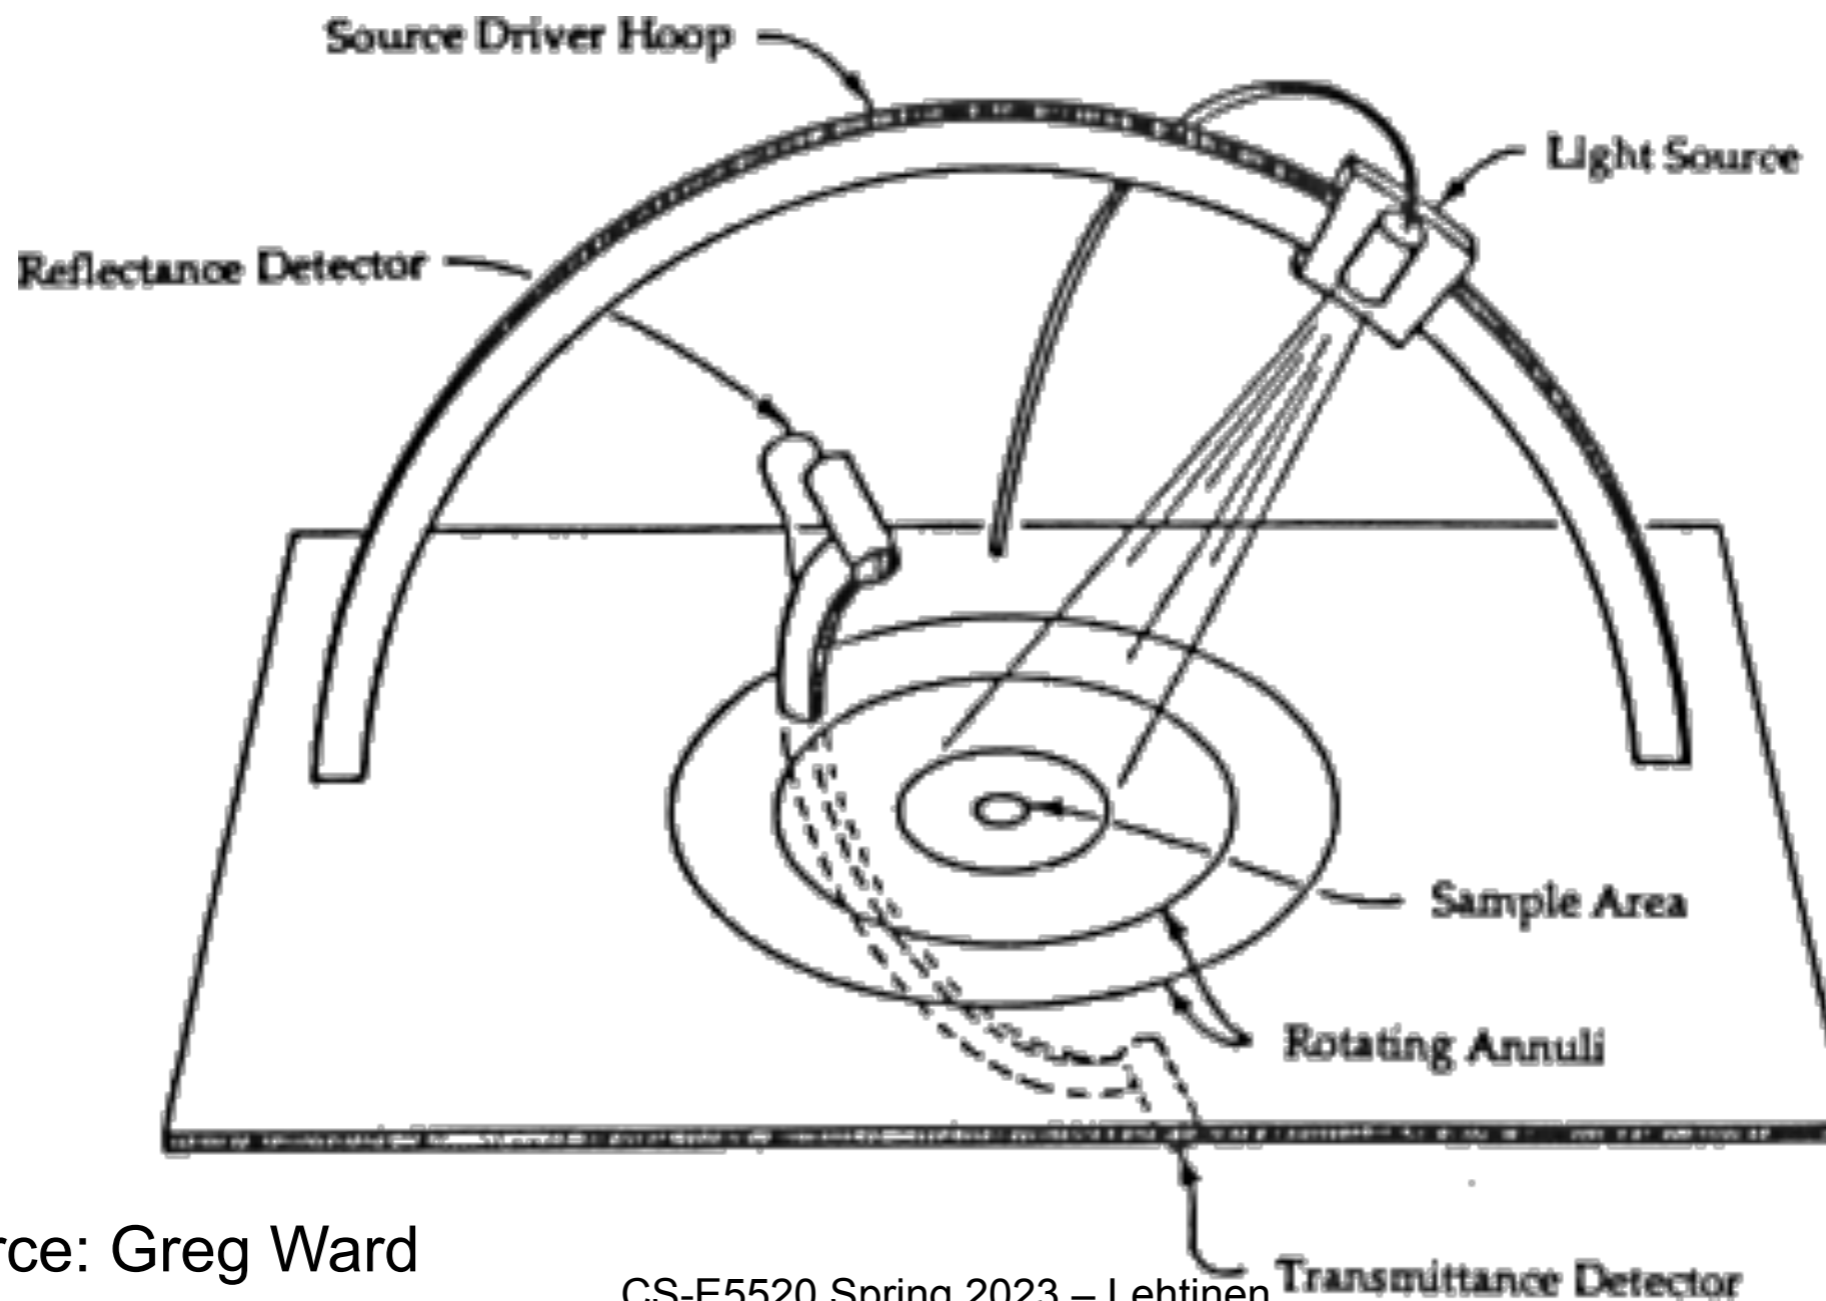

Source: Greg Ward

How do we obtain BRDFs?

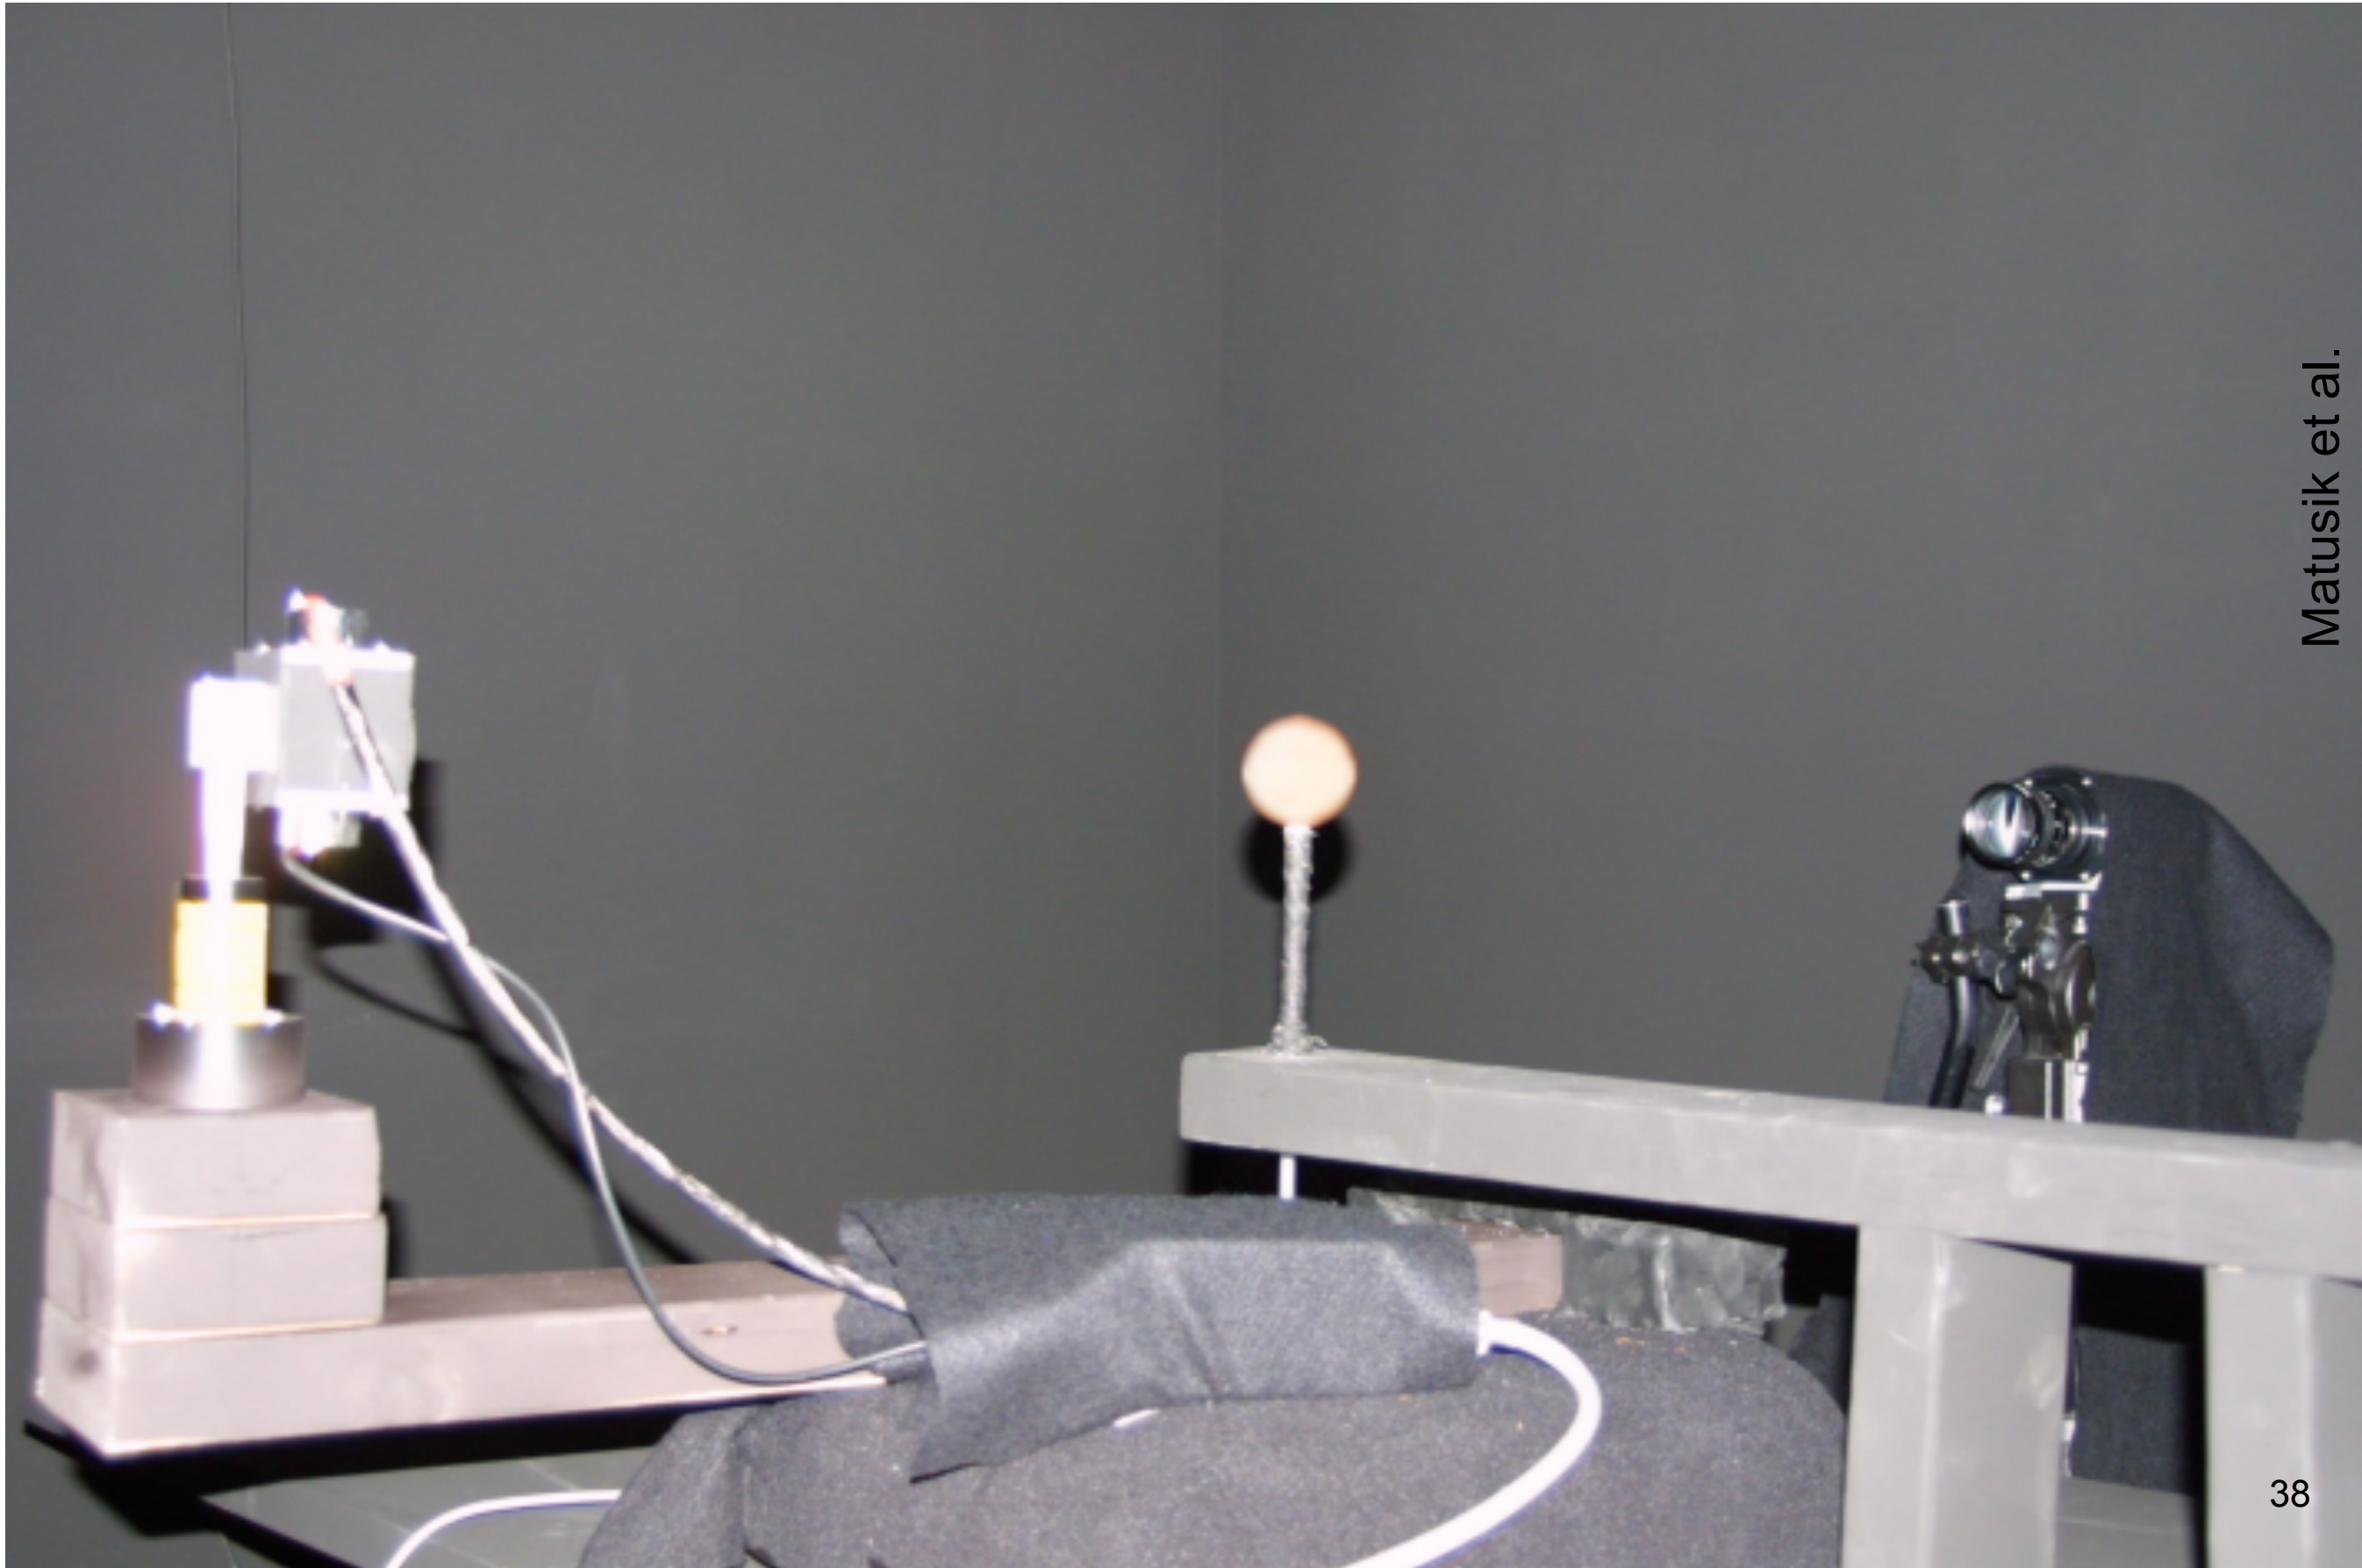



Image-Based Acquisition

- See W. Matusik et al. for how
 - A Data-Driven Reflectance Model, SIGGRAPH 2003
 - The data is available from MERL



We've Pushed State of The Art

Aittala, Weyrich, Lehtinen, *Practical SVBRDF*
Capture in the Frequency Domain, SIGGRAPH 2013

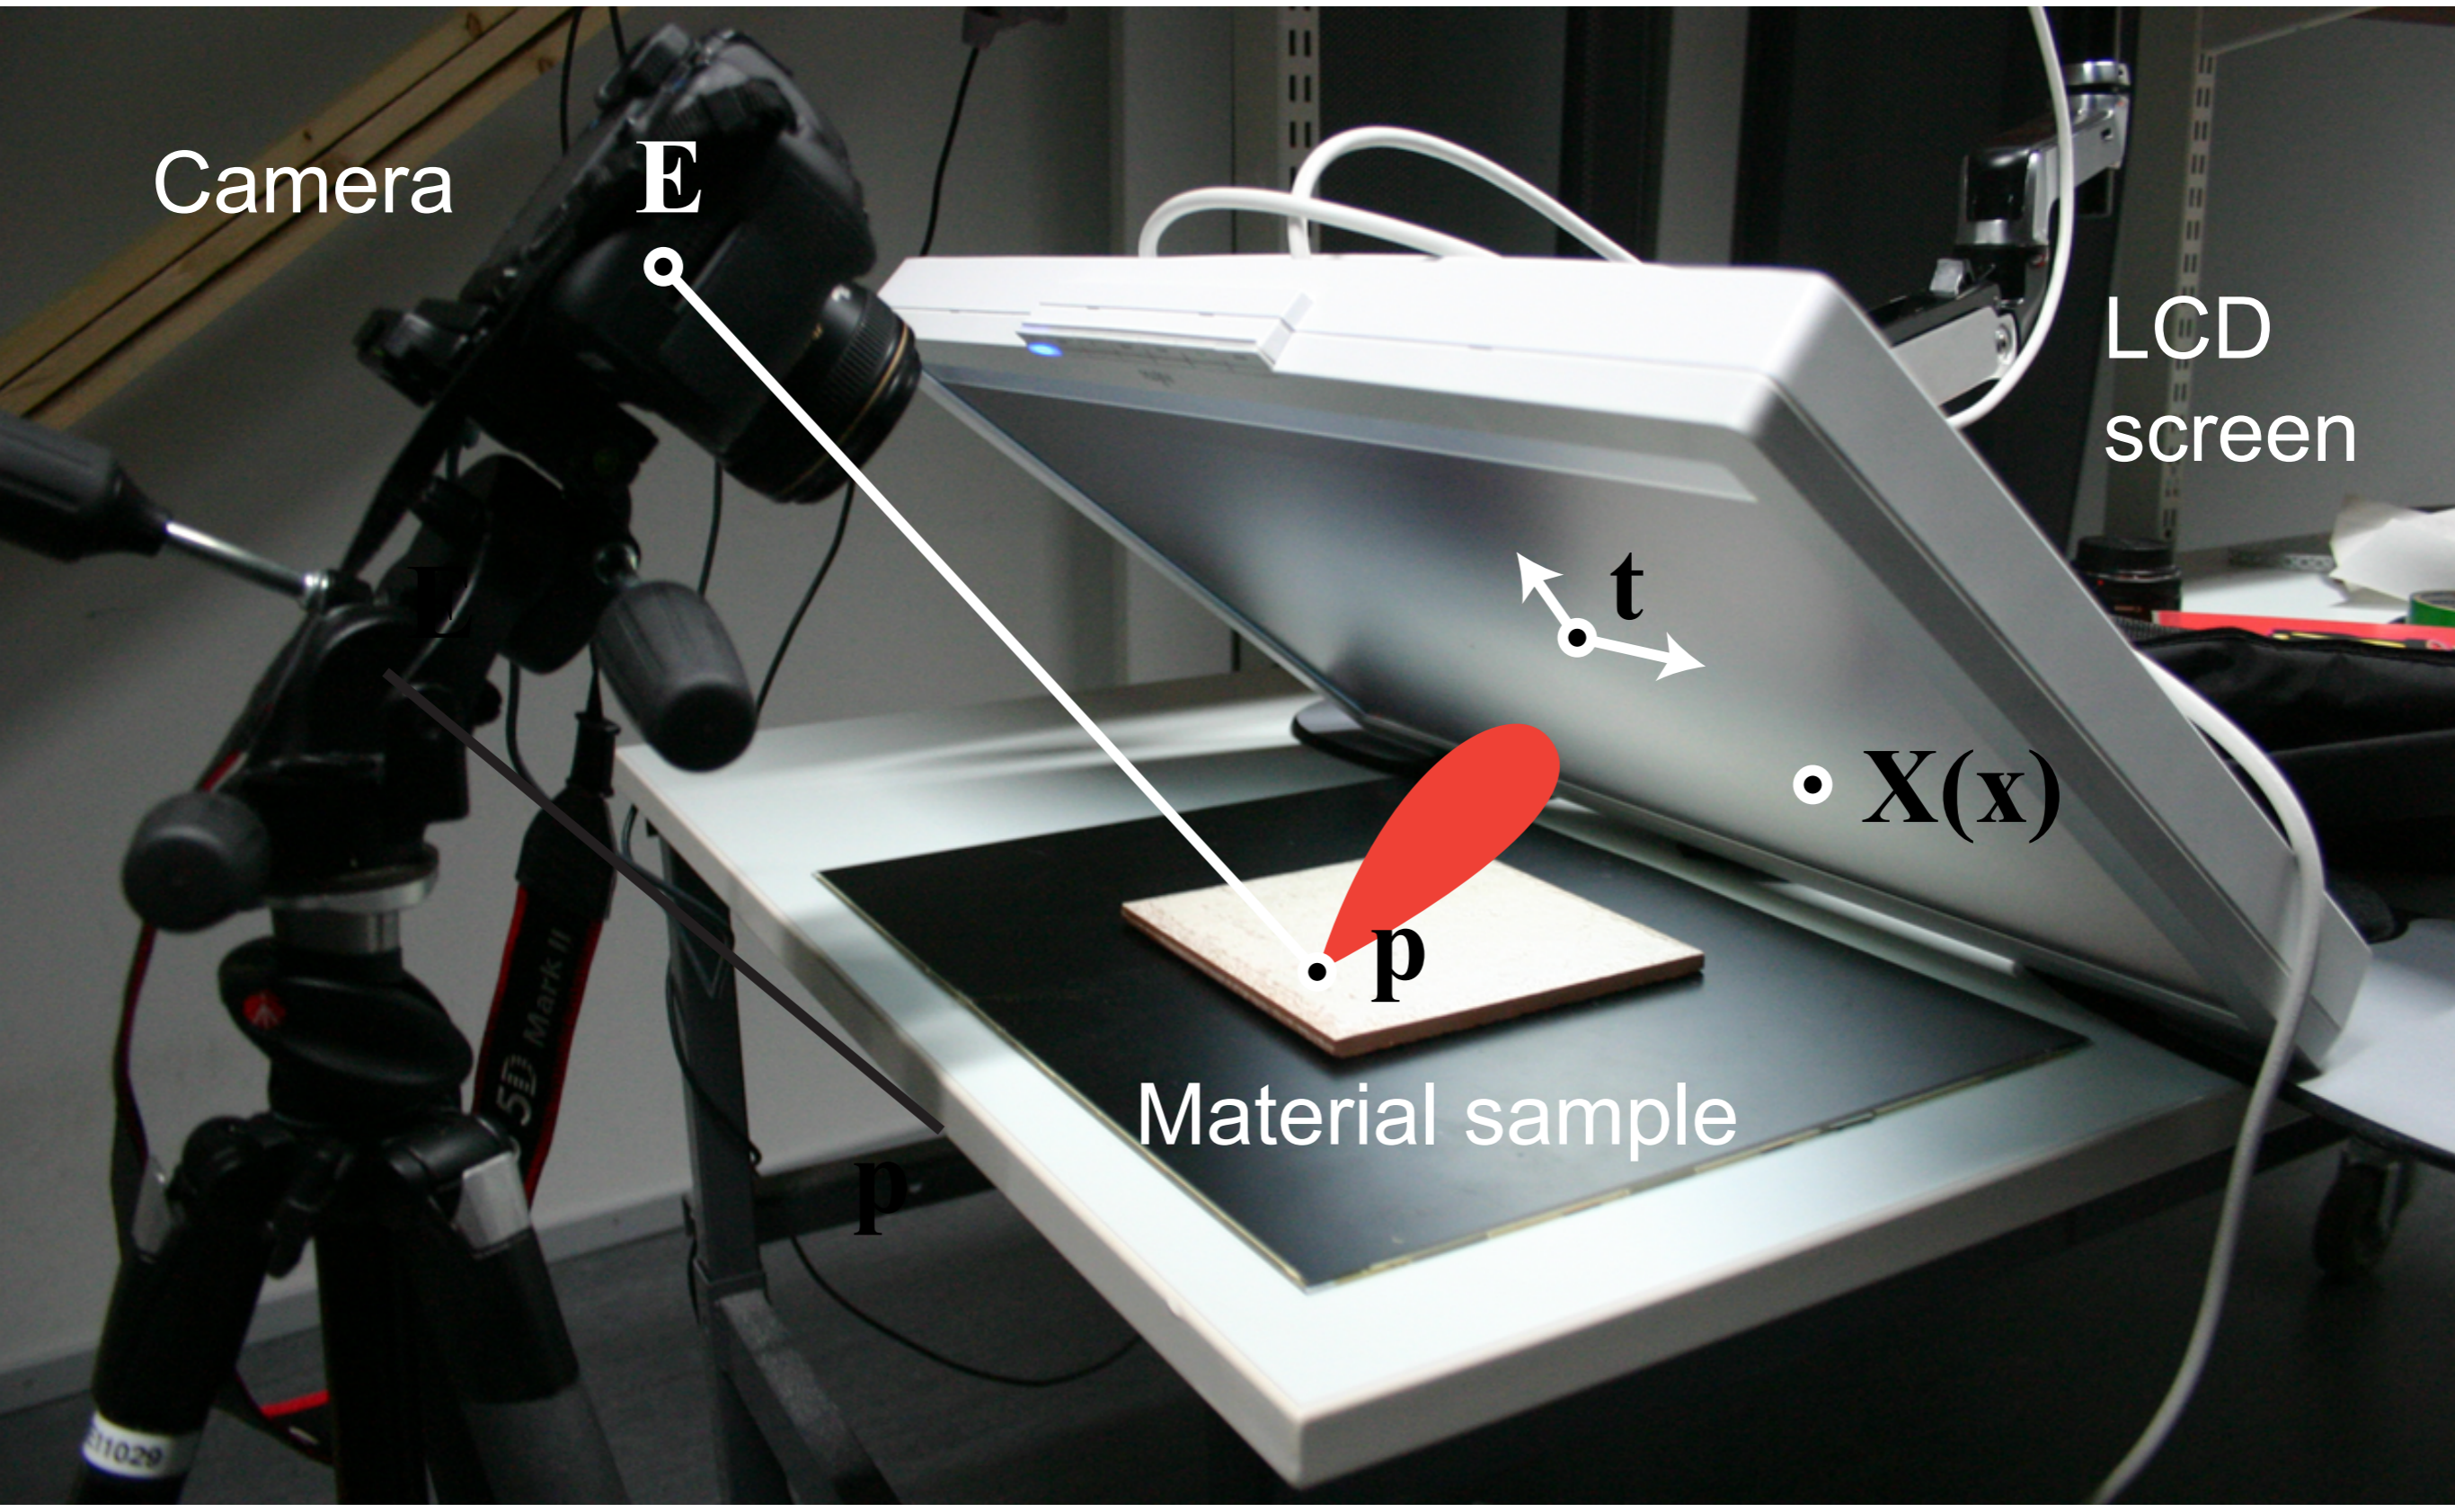

Even less effort...

with some restrictions on what materials can be captured

- SIGGRAPH 2015, <http://tinyurl.com/TwoShotSVBRDF>

Two-Shot SVBRDF Capture for Stationary Materials

Miika Aittala

Aalto University


Tim Weyrich

University College London

Jaakko Lehtinen

Aalto University, NVIDIA

Capture

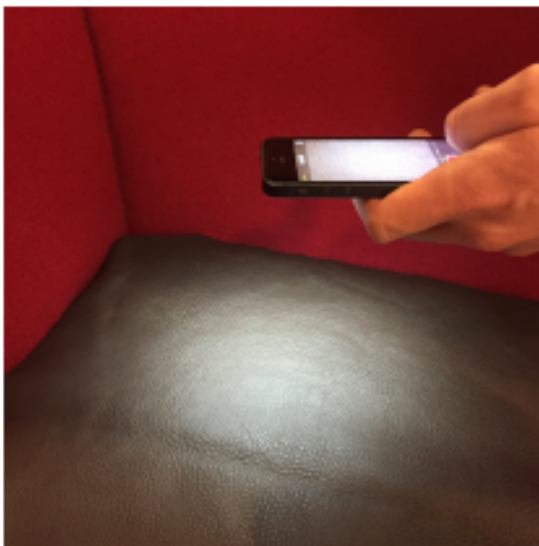

Flash image



No-flash image



SVBRDF Decomposition

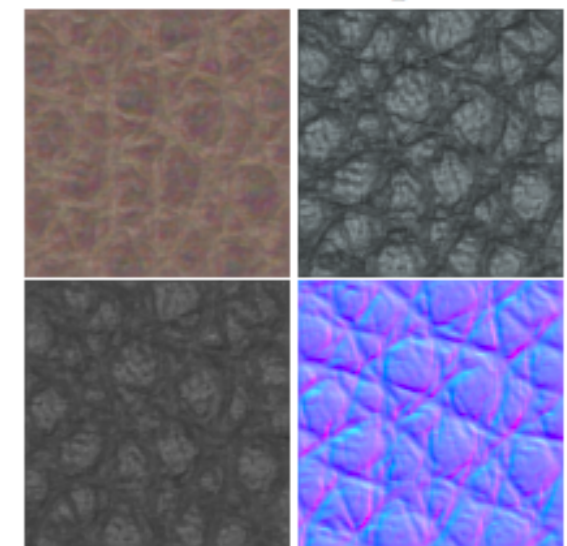


Figure 1: Given an flash-no-flash image pair of a “textured” material sample, our system produces a set of spatially varying BRDF parameters (an SVBRDF, right) that can be used for relighting the surface. The capture (left) happens in-situ using a mobile phone.

Questions?

Microfacet Theory

- Example

- Think of water surface as lots of tiny mirrors (microfacets)
- “Bright” pixels are
 - Microfacets aligned with the vector between sun and eye
 - But not the ones in shadow
 - And not the ones that are occluded




Microfacet Theory

- Model surface by tiny mirrors
[Torrance & Sparrow 1967]




Microfacet Theory

- Value of BRDF at (L, V) is a product of
 - number of mirrors oriented halfway between L and V

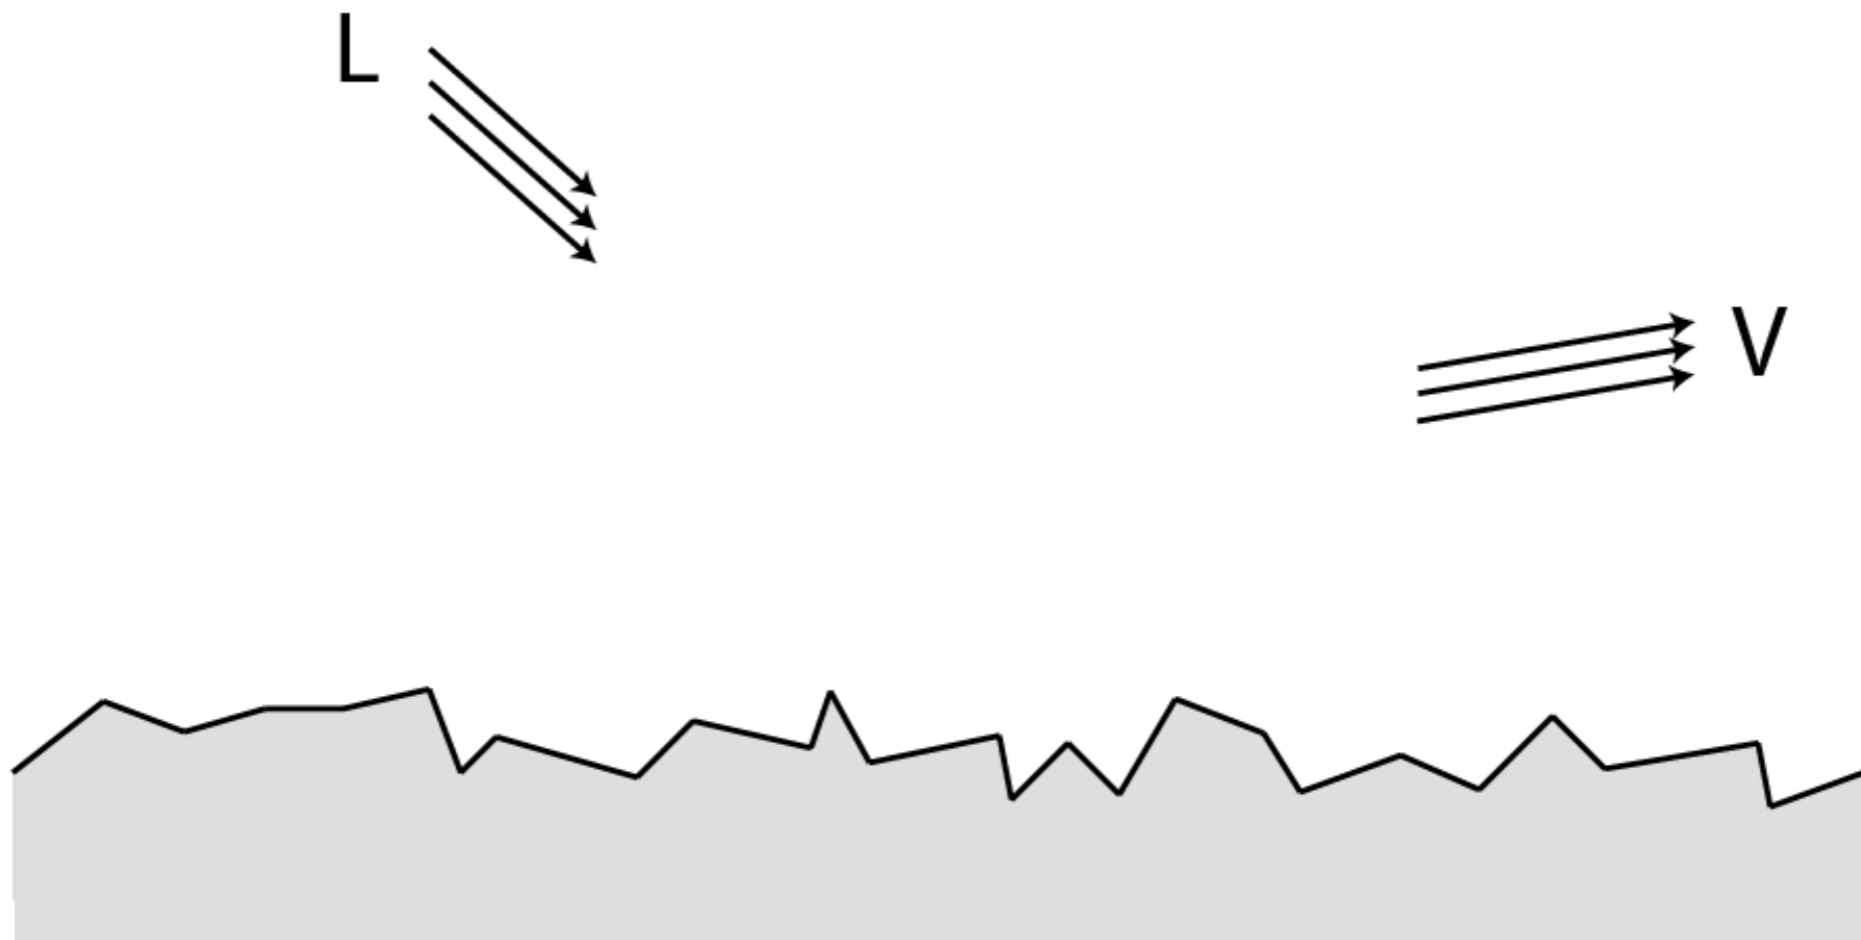


Microfacet Theory

- Value of BRDF at (L, V) is a product of
 - number of mirrors oriented halfway between L and V

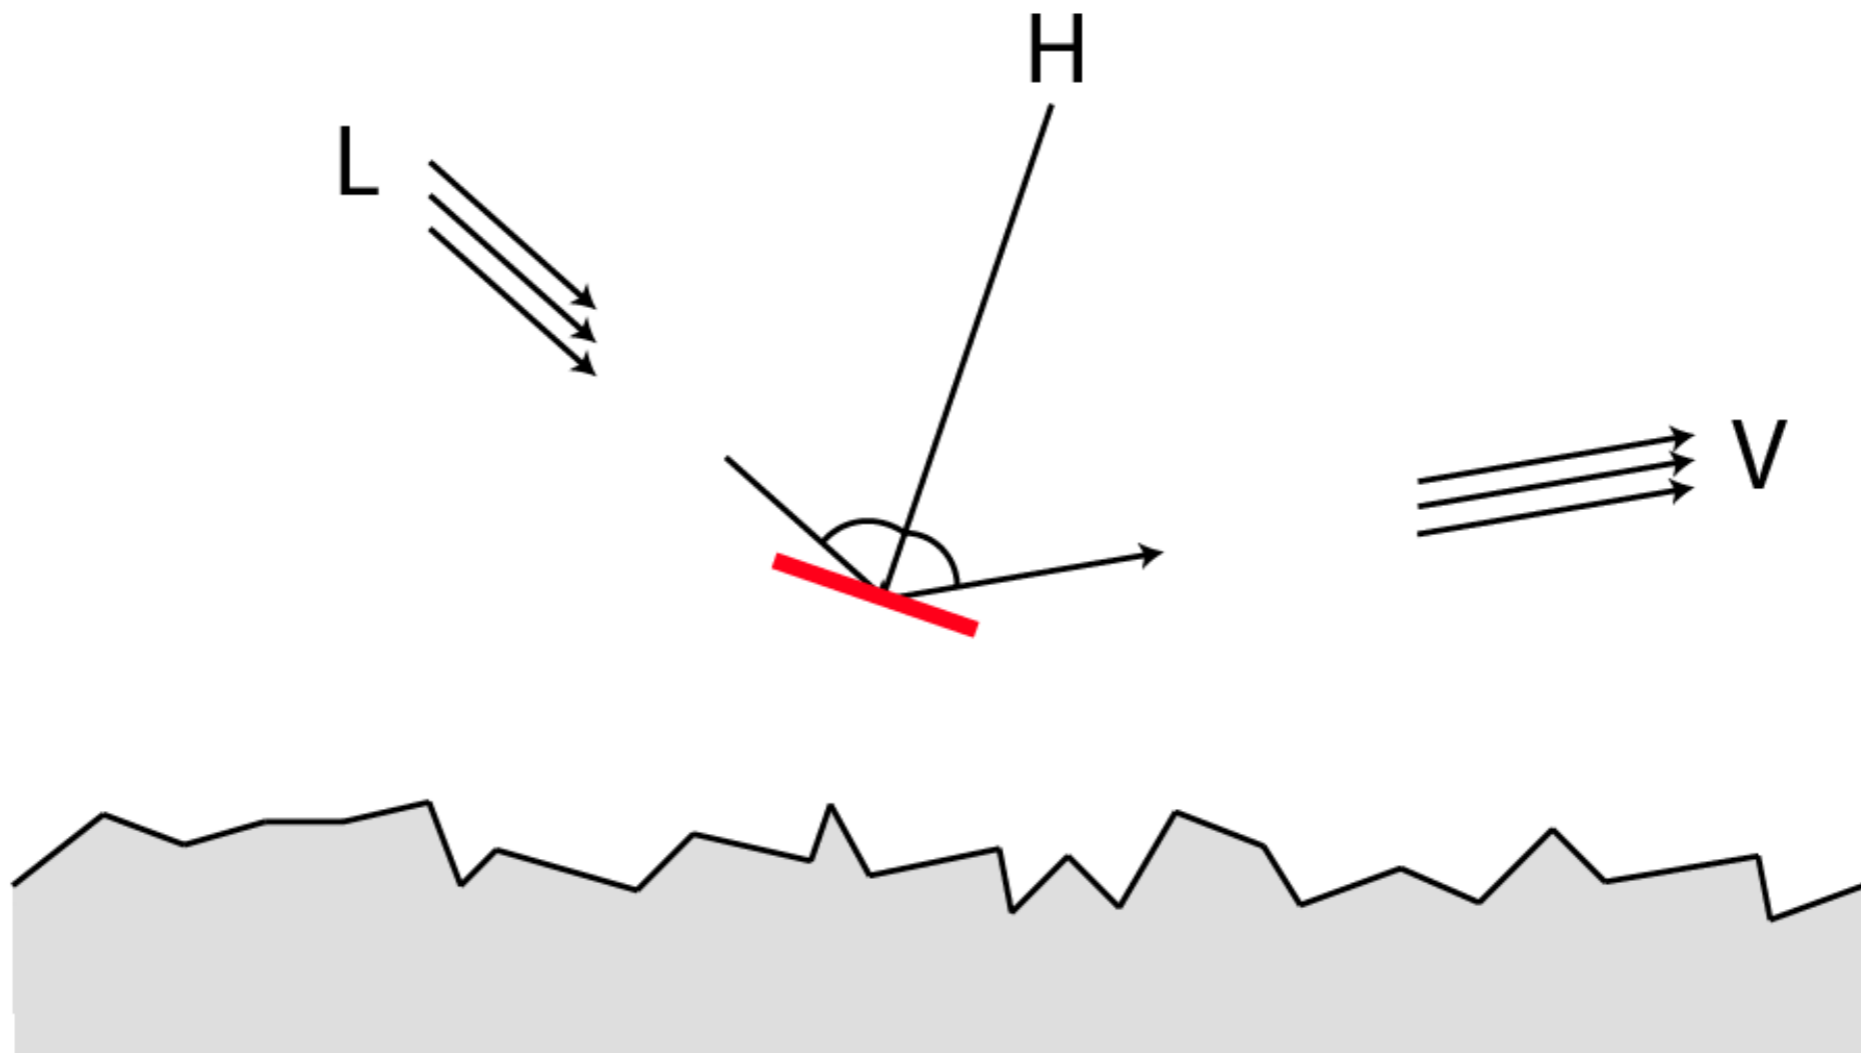


Microfacet Theory

- Value of BRDF at (L, V) is a product of
 - number of mirrors oriented halfway between L and V

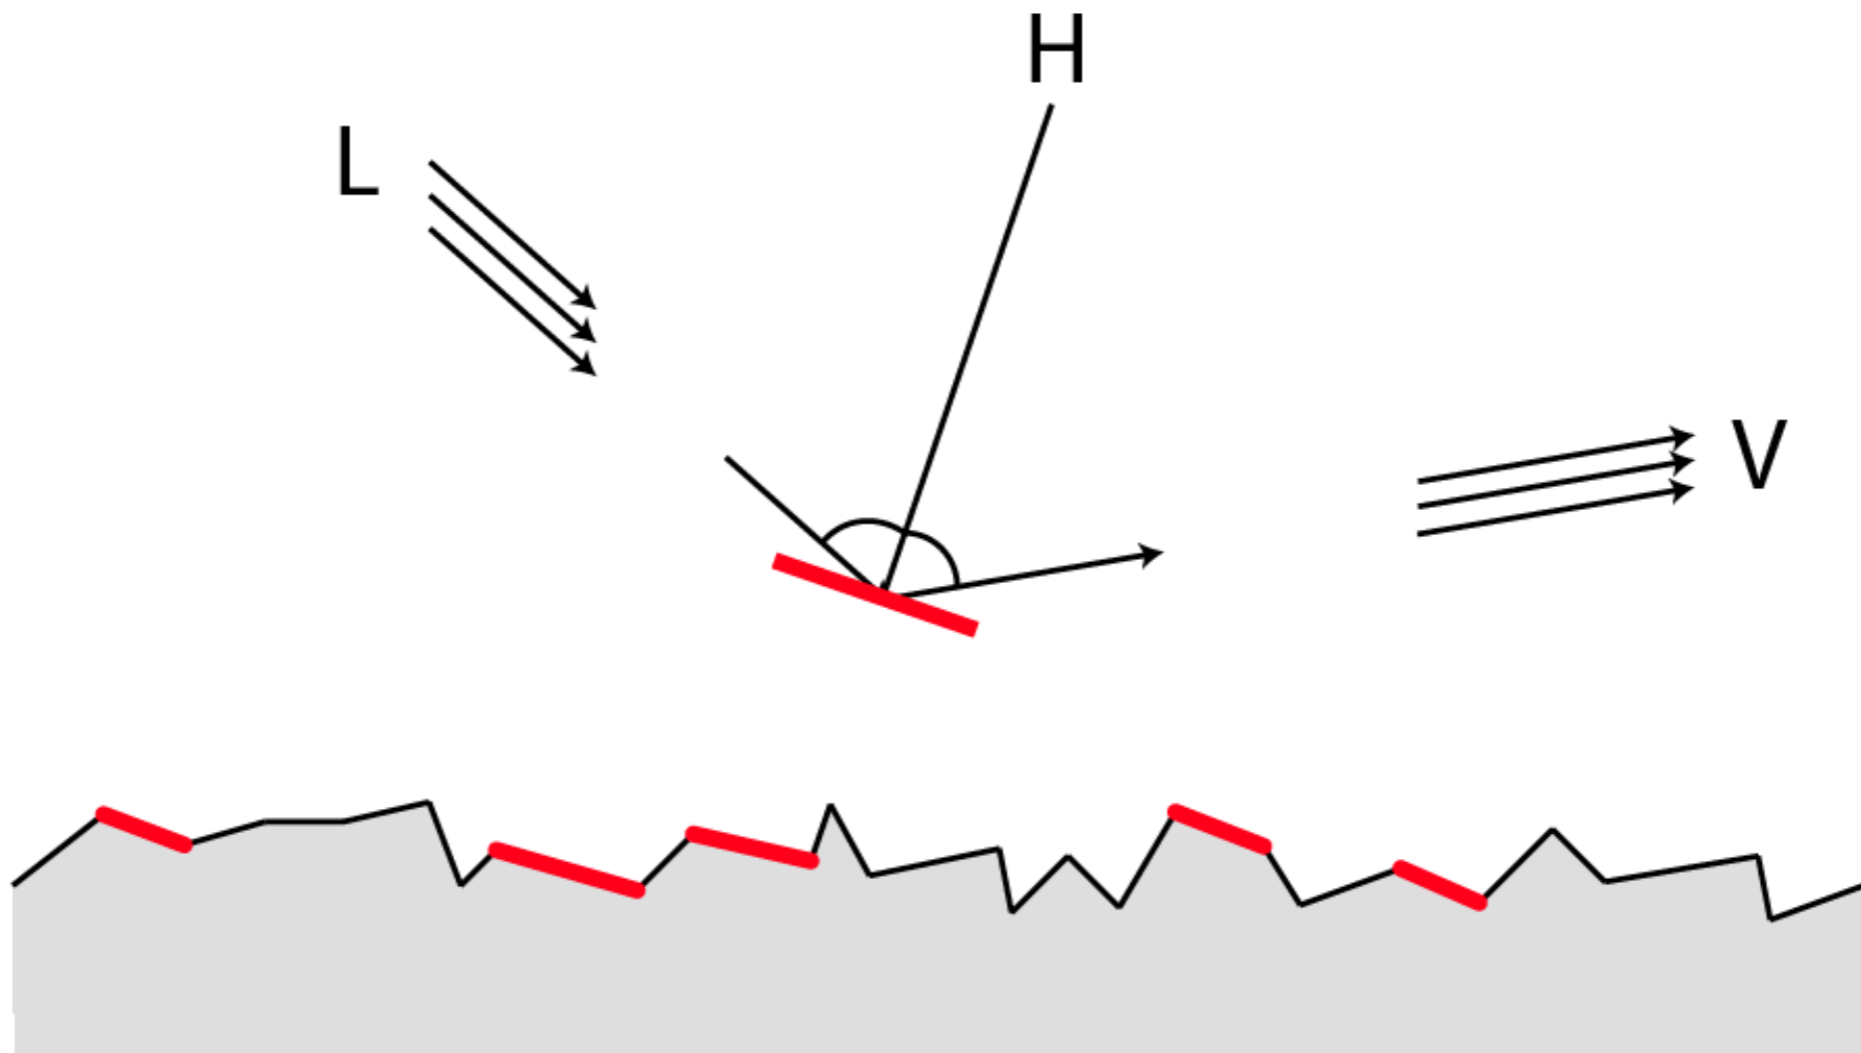


Microfacet Theory

- Value of BRDF at (L, V) is a product of
 - number of mirrors oriented halfway between L and V
 - ratio of the un(shadowed/masked) mirrors

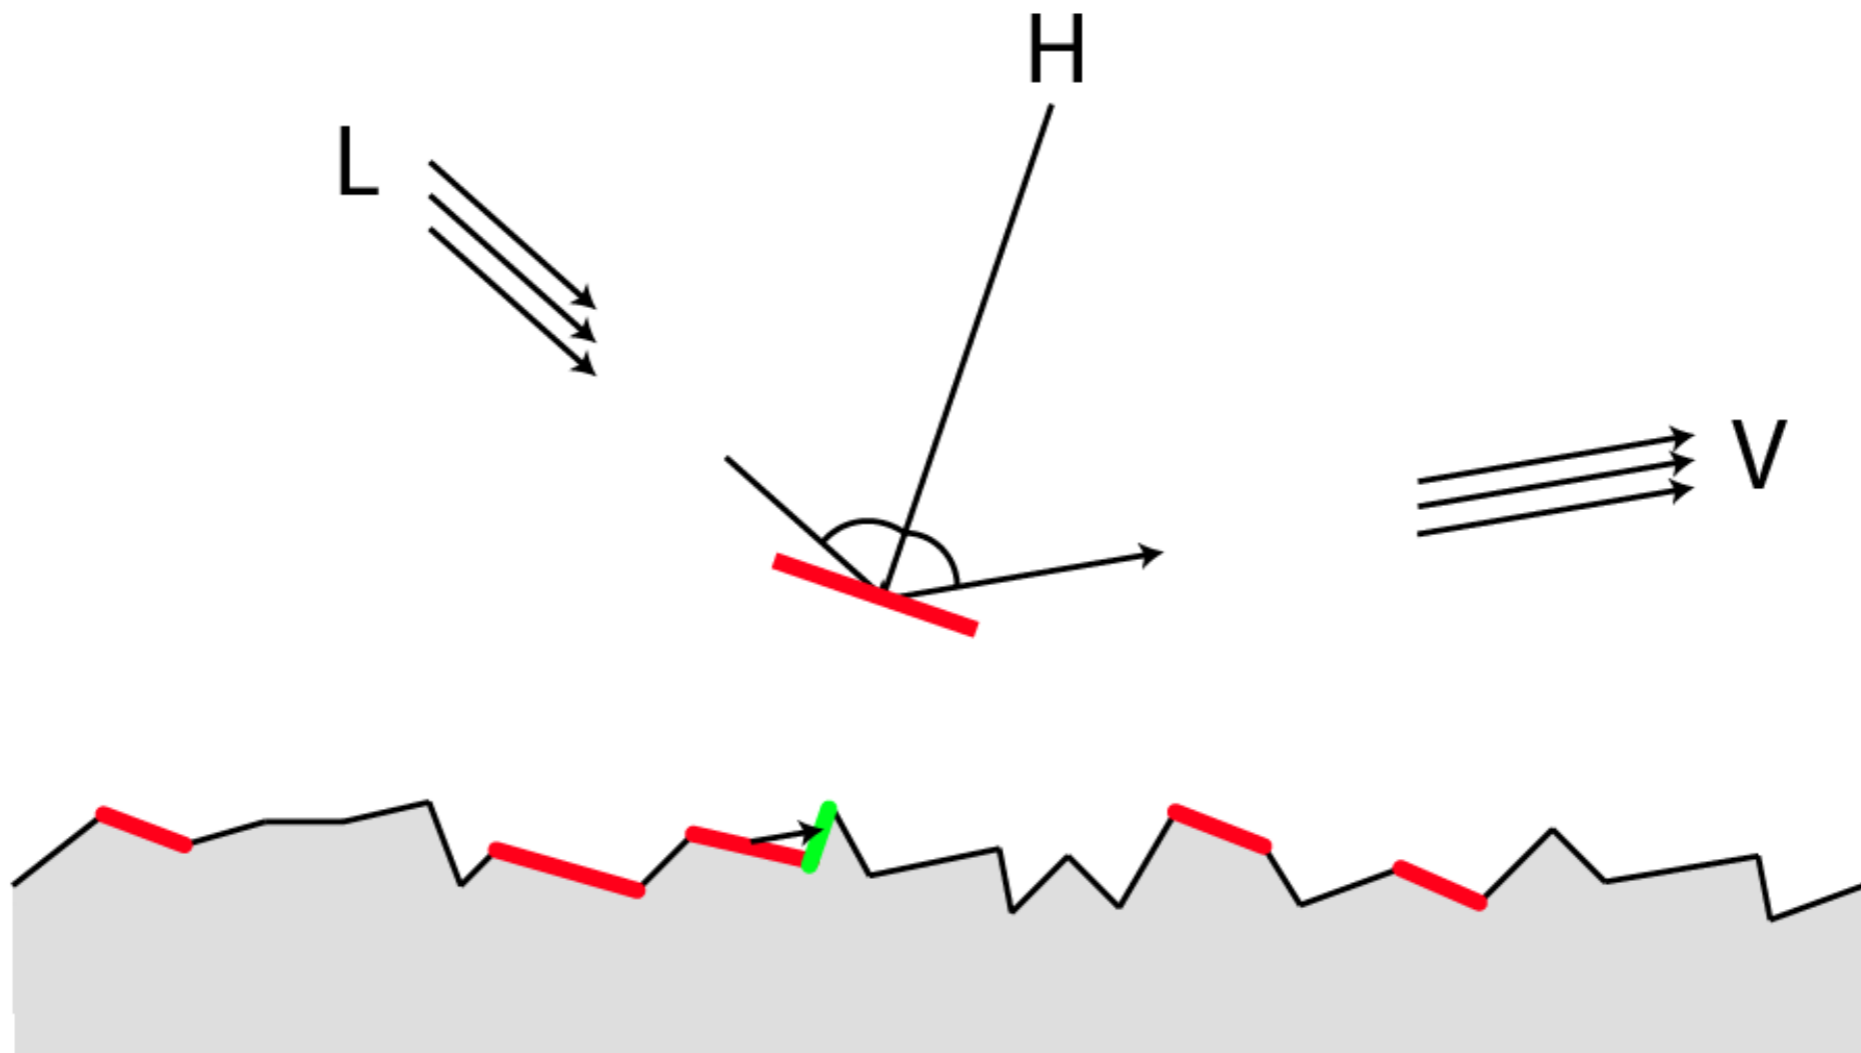

Microfacet Theory

- Value of BRDF at (L, V) is a product of
 - number of mirrors oriented halfway between L and V
 - ratio of the un(shadowed/masked) mirrors
 - Fresnel coefficient

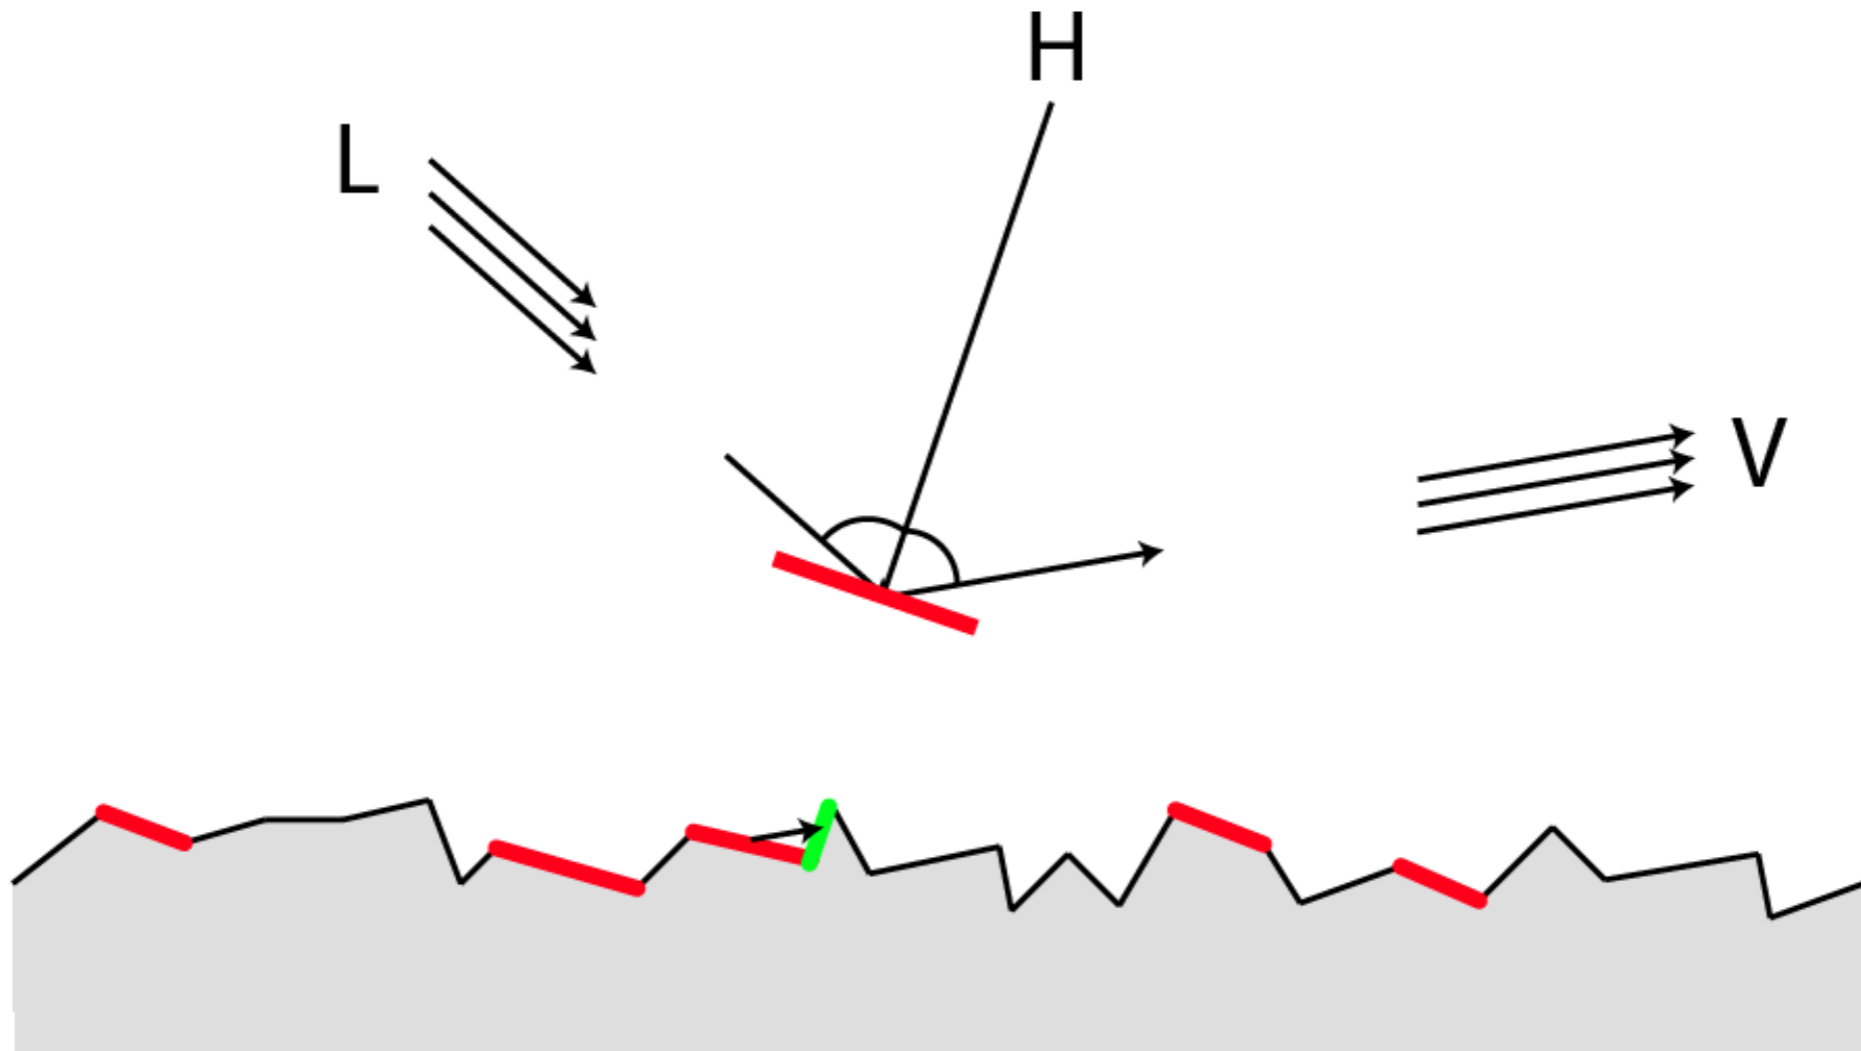


Microfacet Theory-based Models

- Develop BRDF models by imposing simplifications [Torrance-Sparrow 67], [Blinn 77], [Cook-Torrance 81], [Ashikhmin et al. 2000]

- Model the distribution $D(\mathbf{h})$ of microfacet normals

– Also, statistical models for shadows and masking

- As always, $\mathbf{h} = \frac{\mathbf{l} + \mathbf{v}}{\|\mathbf{l} + \mathbf{v}\|}$

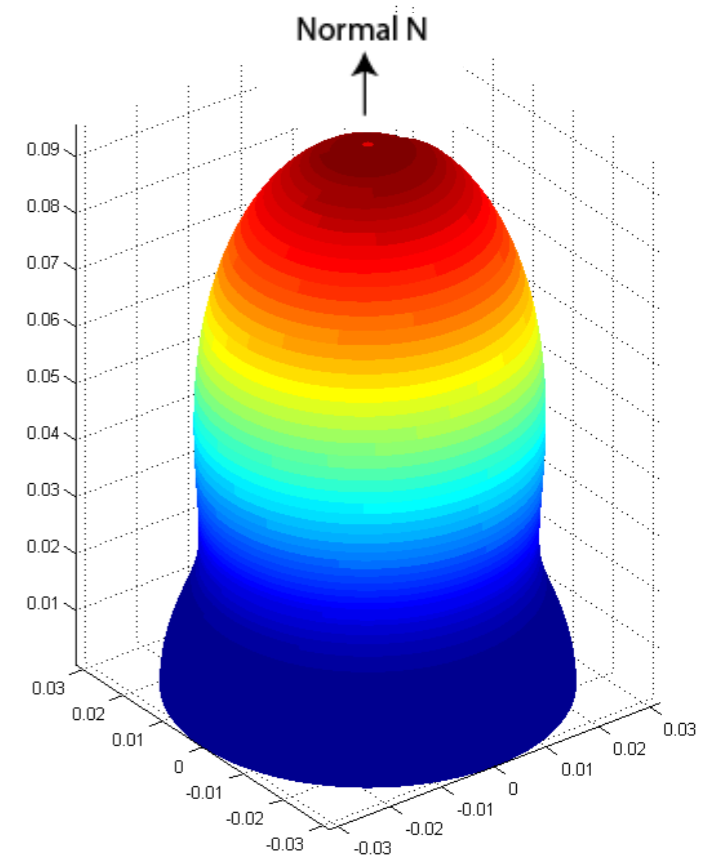

spherical plot of a Gaussian-like $p(H)$

General Microfacet BRDF (Cook-Torrance)

- Sum of Diffuse and Specular terms:

$$f_r = \frac{\rho_d}{\pi} + \frac{\rho_s}{\pi} \frac{F(\mathbf{l} \cdot \mathbf{h}) D(\mathbf{h}) G(\mathbf{l}, \mathbf{v})}{(\mathbf{n} \cdot \mathbf{l})(\mathbf{n} \cdot \mathbf{v})}$$

- F is the Fresnel term that accounts for increasing reflection towards grazing angle
- D is the microfacet distribution (common models include Gaussian, Blinn-Phong, Beckmann
 - Shifted Gamma is the new king of the hill
- G is the geometric (shadowing, masking) term
- See linked papers for details


Blinn-Torrance Variation of Phong

- Uses the “halfway vector” \mathbf{h} between \mathbf{l} and \mathbf{v} .

$$D(\mathbf{h}) = N_q (\mathbf{n} \cdot \mathbf{h})^q \qquad \mathbf{h} = \frac{\mathbf{l} + \mathbf{v}}{\|\mathbf{l} + \mathbf{v}\|}$$

$$N_q = \frac{n + 1}{2\pi}$$

is a normalization factor

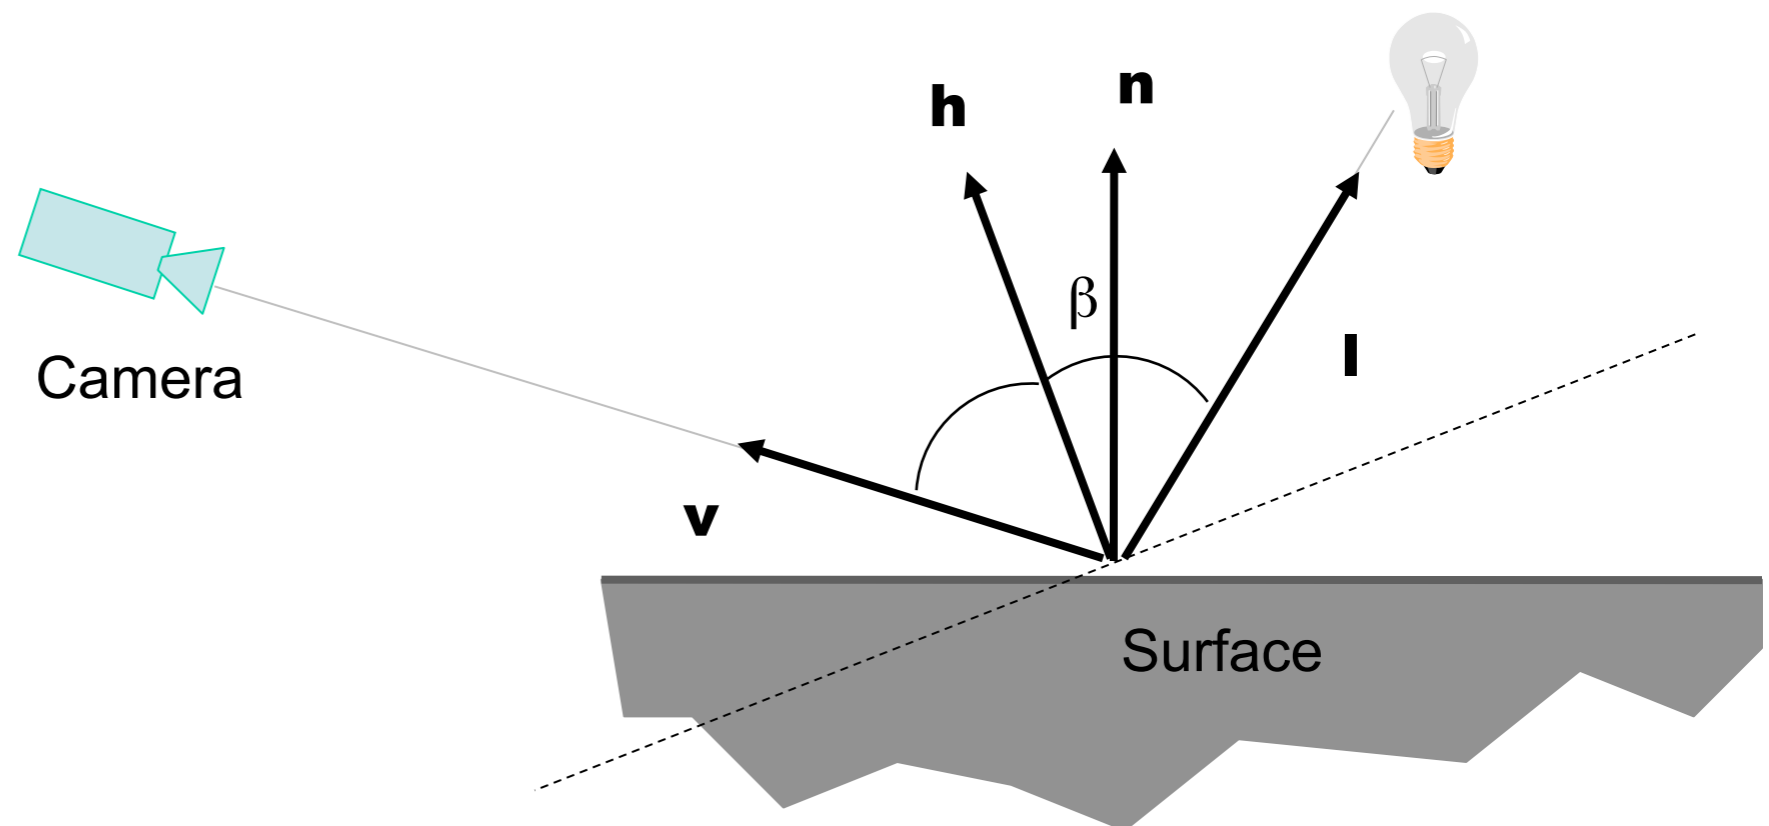


Geometric (Shadowing, Masking) Term

- Can be computed from microfacet distribution by integration
- Cook and Torrance used a heuristic formula

$$G = \min \left\{ 1, \frac{2(\mathbf{N} \cdot \mathbf{H})(\mathbf{N} \cdot \mathbf{V})}{(\mathbf{V} \cdot \mathbf{H})}, \frac{2(\mathbf{N} \cdot \mathbf{H})(\mathbf{N} \cdot \mathbf{L})}{(\mathbf{V} \cdot \mathbf{H})} \right\}$$

- Current models are more well-founded than this, see e.g. [this paper](#)

BRDF Examples: see Ngan et al.

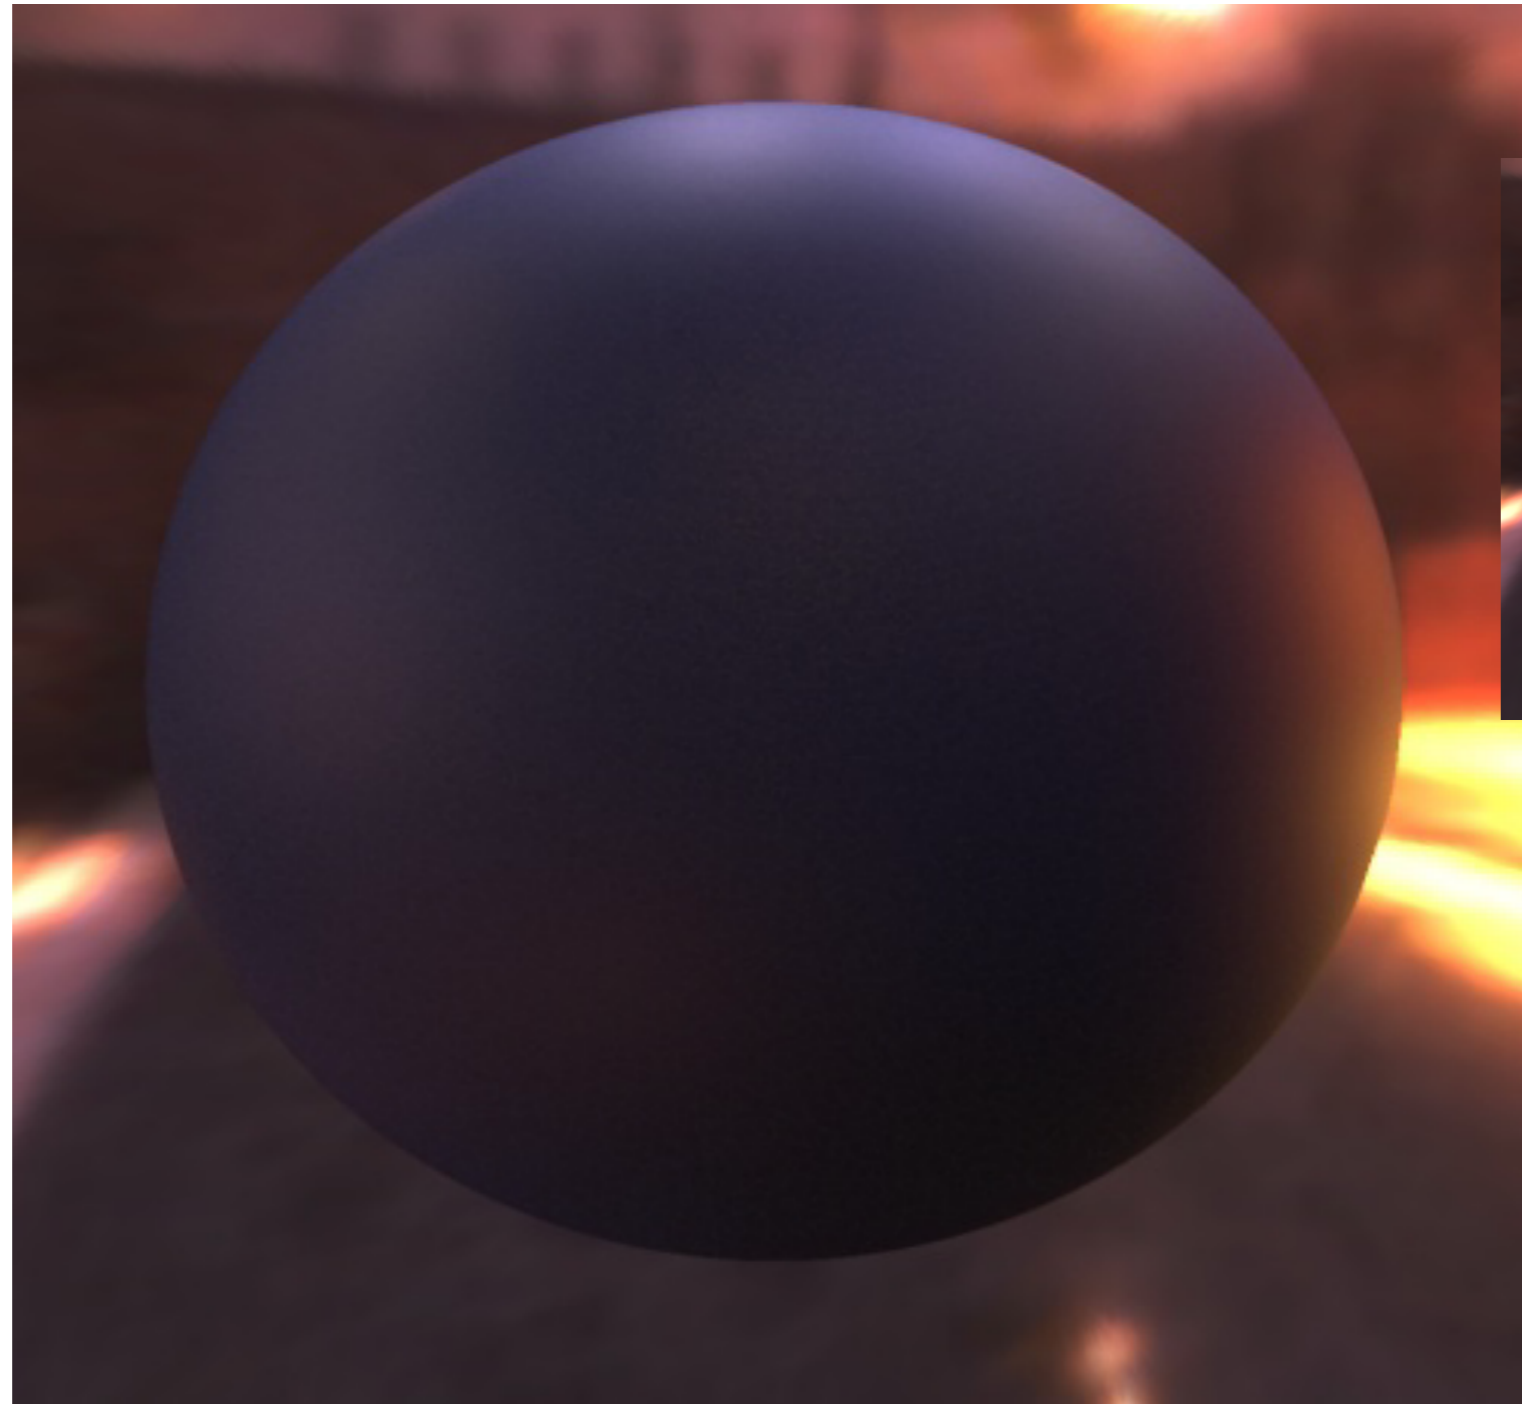


Material – Dark blue paint

CS-E5520 Spring 2023 – Lehtinen

Questions?

- “Designer BRDFs” by Ashikhmin et al.

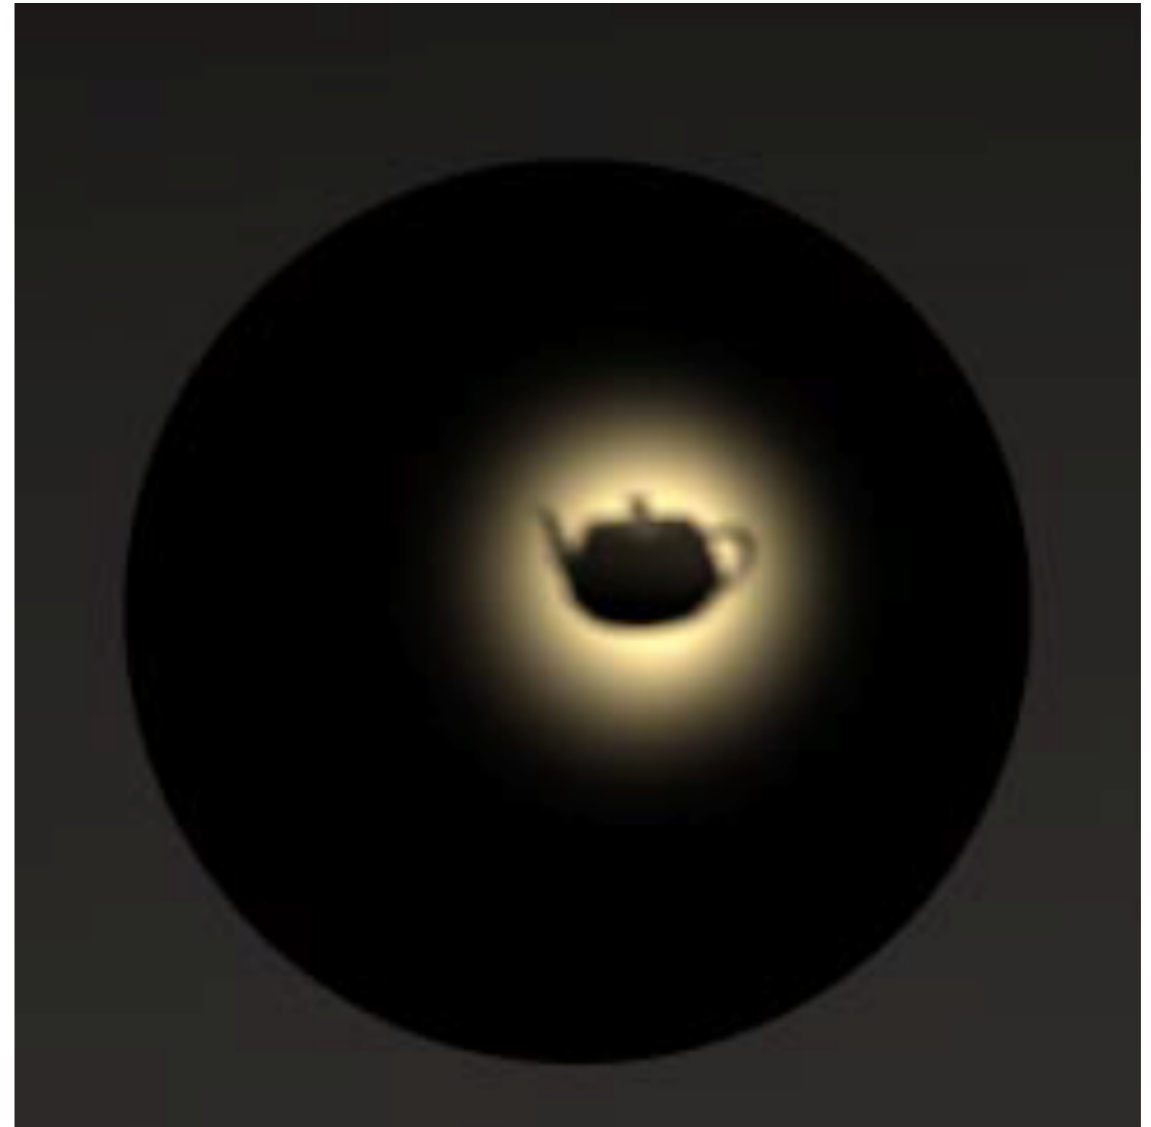

Reflectance

- Careful optimization + milling allows one to create a surface that reflects light in such funky ways
- Weyrich, Peers, Matusik, Rusinkiewicz SIGGRAPH 2009, Fabricating Microgeometry for Custom Surface Reflectance

Fabricating Microgeometry for Custom Surface Reflectance

Tim Weyrich

University College London

Pieter Peers

University of Southern California,
Institute for Creative Technologies

Wojciech Matusik

Adobe Systems, Inc.

Szymon Rusinkiewicz

Princeton University,
Adobe Systems, Inc.




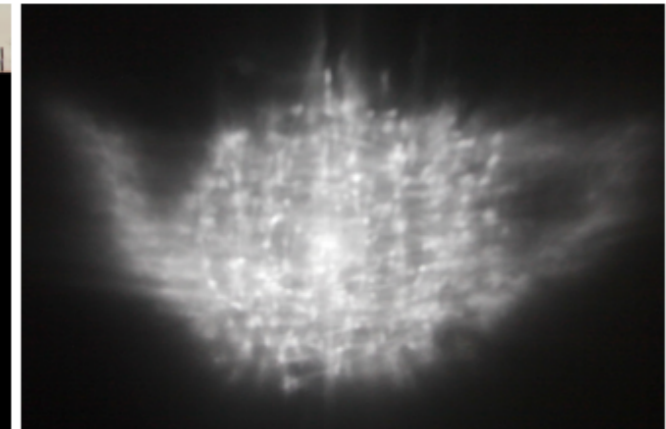


Figure 1: From left: a user-designed highlight is converted to an optimized microfacet height field. A computer-controlled milling machine is used to manufacture the surface (30×30 facets, each approximately $1 \text{ mm} \times 1 \text{ mm}$), which exhibits the desired reflectance.

Pure Reflection (BRDF)

BRDF: Light reflects off exactly the same point

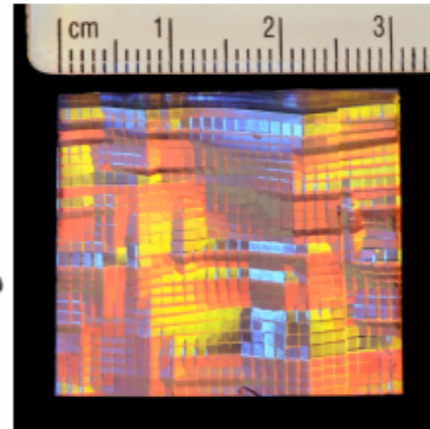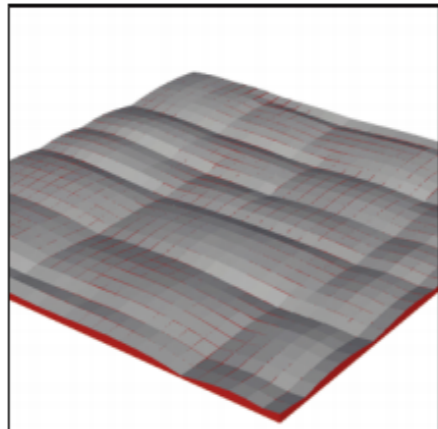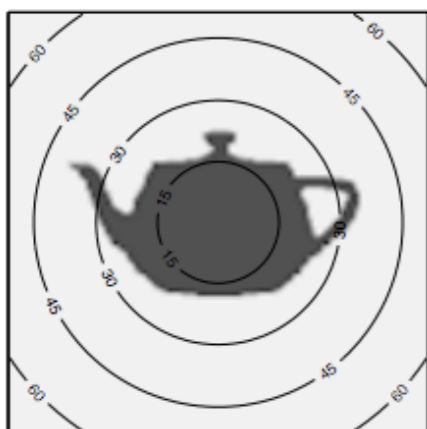

Subsurface Scattering (BSSRDF)

Some light enters material, exits at another point

BSSRDF = Bidirectional Surface Scattering Distribution Function

(See Henrik's paper linked to the title)



Subsurface State of the Art: Weta Digital

See [Eugene's paper](#)



BRDF vs. BSSRDF

Jensen et al. SIGGRAPH 2001

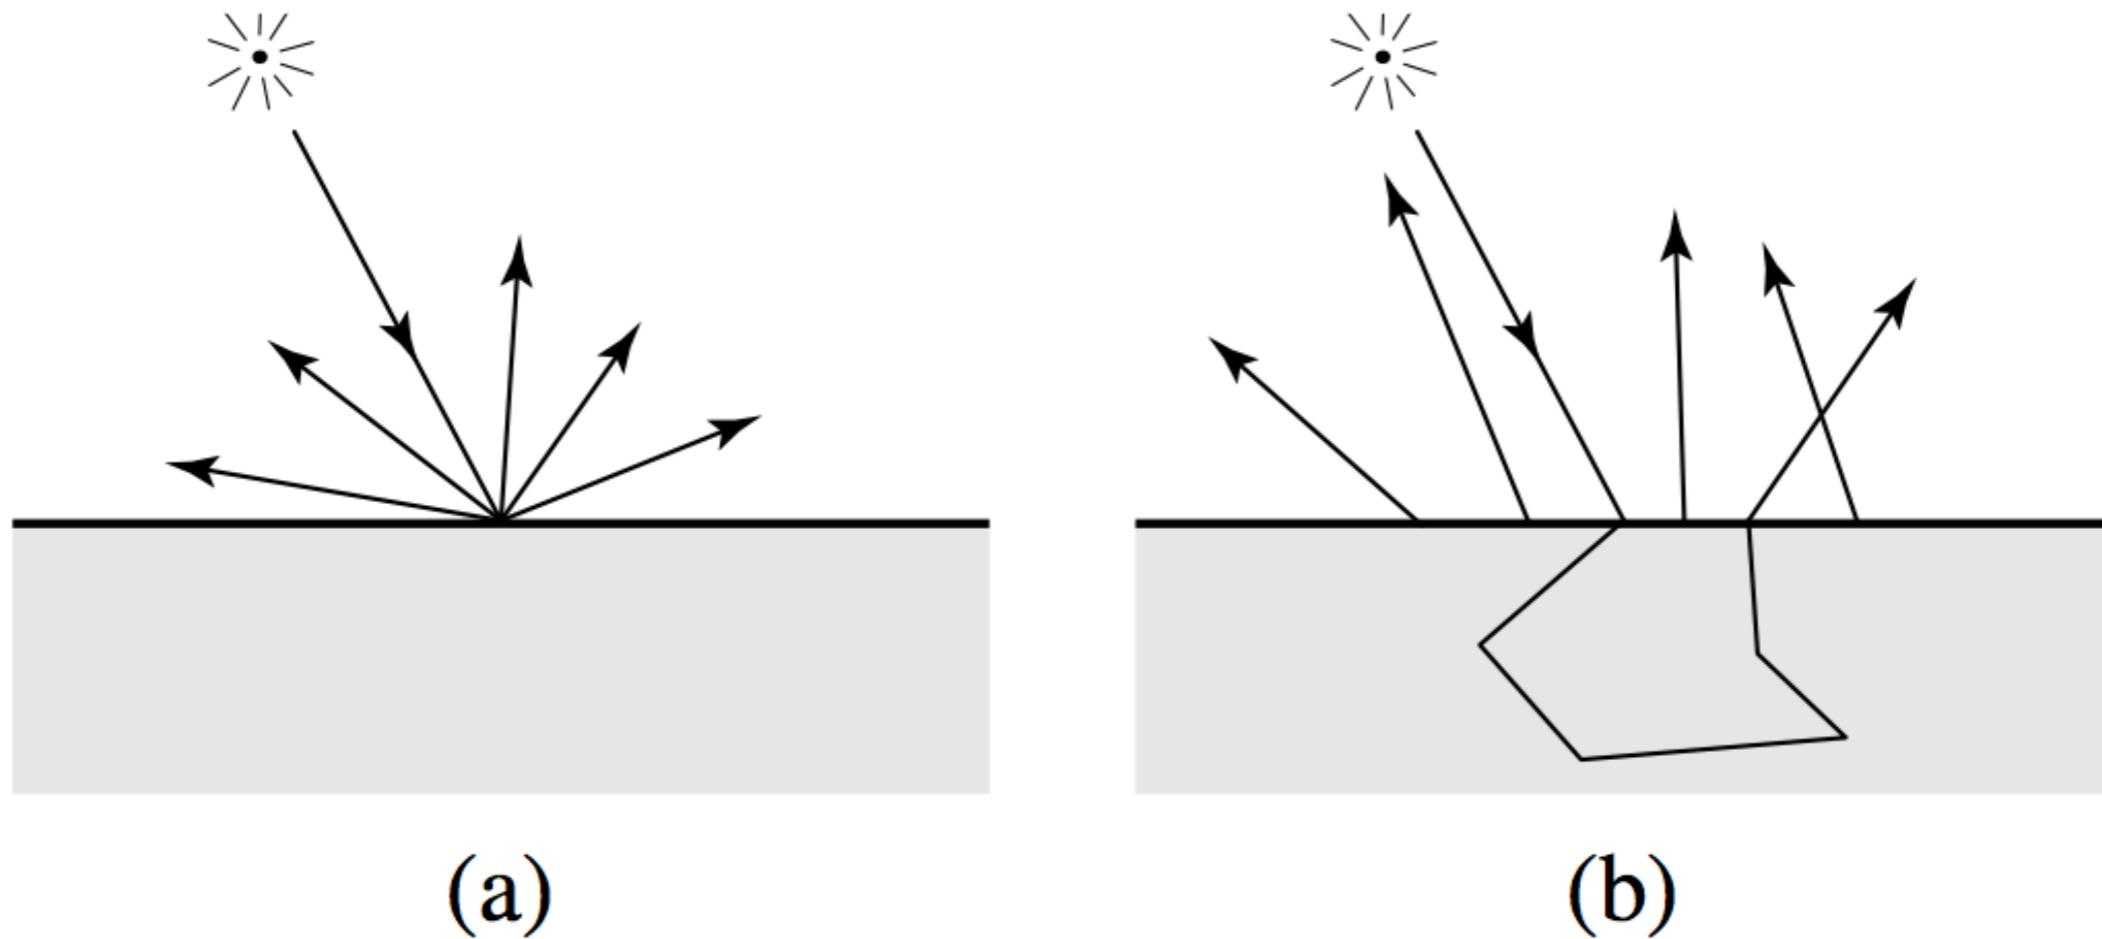


Figure 1: Scattering of light in (a) a BRDF, and (b) a BSSRDF.

BSSRDF Definition

- Relates differential irradiance *at all points* and all directions to outgoing radiance *at every other point* and all outgoing directions
 - 8D! Ouch!

$$L(x \rightarrow \mathbf{v}) = \int_A \int_{\Omega} L(y \leftarrow \mathbf{l}) f_r(x, y, \mathbf{l}, \mathbf{v}) \cos \theta \, d\mathbf{l} \, dA_y$$

- To get outgoing light at point x , integrate over all other points y and all incident directions at those points
 - Crazy complicated! Must do something smarter, i.e., cache incident illumination, assume diffuse scattering, etc. (See Henrik)

Questions?



The Way To Global Illumination

$$L(x \rightarrow \mathbf{v}) = \int_{\Omega} L(x \leftarrow \mathbf{l}) f_r(x, \mathbf{l} \rightarrow \mathbf{v}) \cos \theta \, d\mathbf{l}$$

**reflectance
equation**

- Where does incident L come from?
- Next lecture...

